




Wall Mount Monitor

ADD-AAGW

INSTRUCTION - MANUAL

CONTENTS:

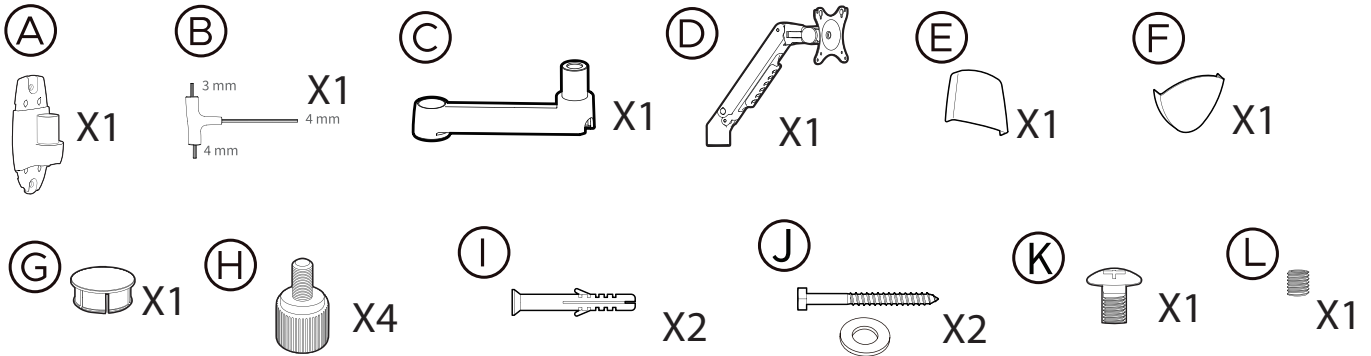


SAFETY WARNINGS:


- Do not exceed the rated load, otherwise the monitor may be damaged or personal injury may be caused.
VESA: 75x75 mm / 100x100 mm
- Please be sure to install according to the instructions. Incorrect installation may cause product damage or personal injury.
- Please use our configuration accessories for installation, otherwise the product may be damaged.
- Ensure that the desk can support the weight of the equipment and all accessories.
- This product contains small parts. If swallowed may cause serious personal injury, please keep it out of the reach of children.
- Do not install the arm until the monitor is installed.
- Before adjusting the arm, please confirm whether the monitor is fixed firmly.
- This product is for indoor use only. Outdoor use may cause product damage.

INSTALLATION:


1-Install the Base

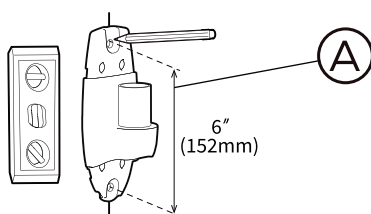

1A. Gather the required tools that are not included: pencil, level, tape measure, drill, 8mm (1/8") drill bit, 10mm socket wrench, and eye protector.

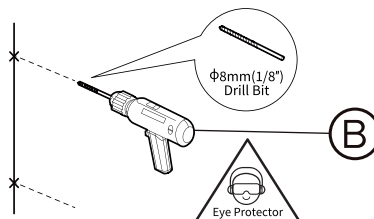


1B. Proceed to drill on the wall using the recommended drill bit and eye protector (Not included).

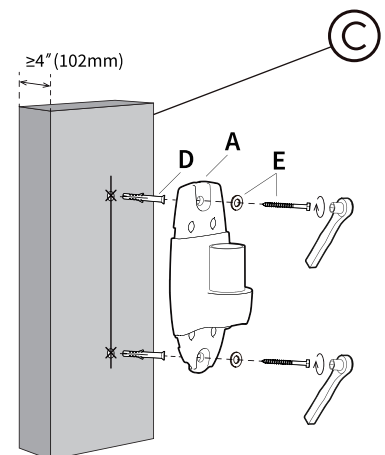

1C. Secure firmly the base using the appropriate hardware.



2-Install The Monitor

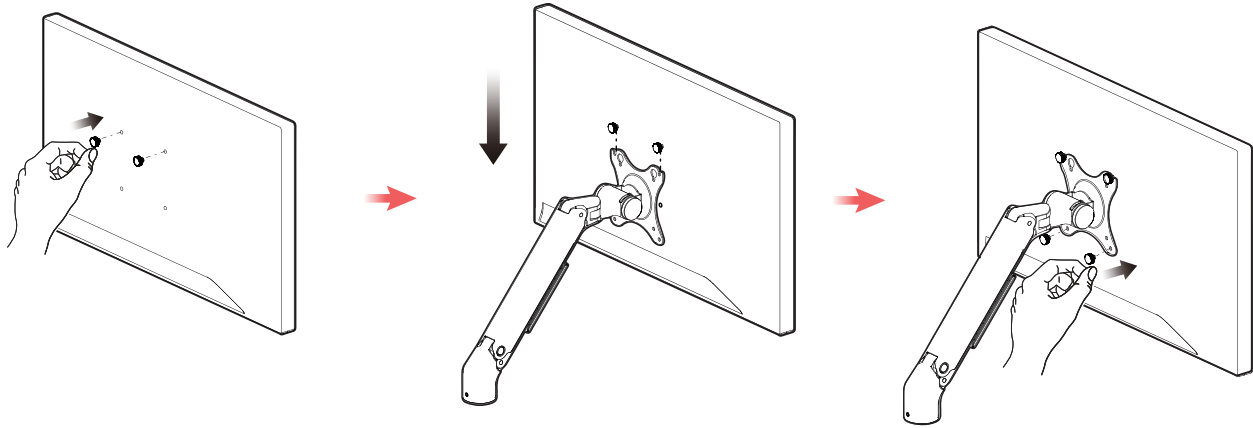


2A. Take the screen and secure it to the mount plate.
The mount is compatible with VESA hole patterns of
75x75 mm and 100x100 mm.



3- Install The Extension Arm

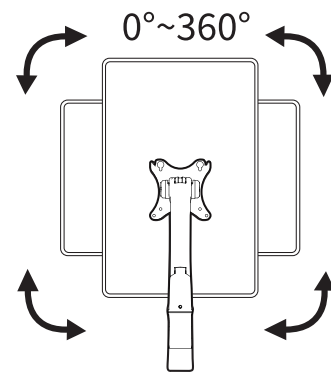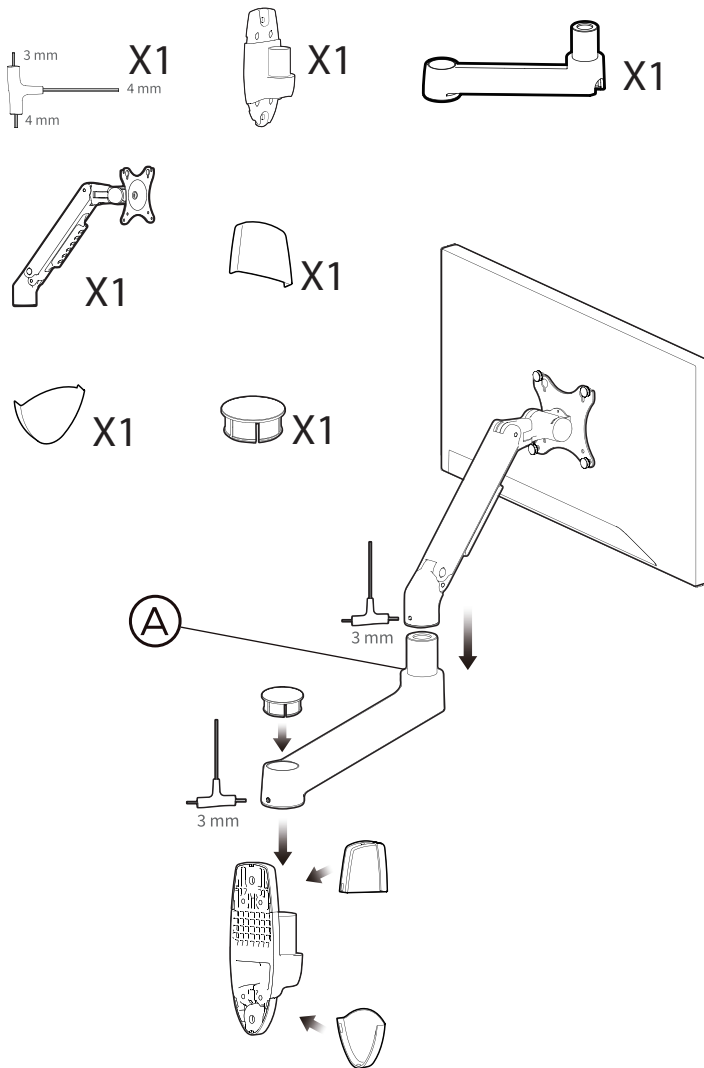



For 90° rotation, add screw.

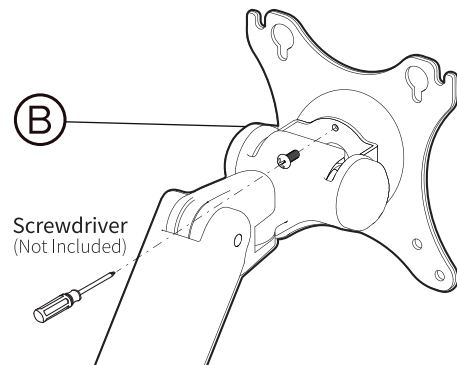

3A. Assemble the extension arm pieces using a screwdriver
(not included).






3B. If you require the arm rotation to be limited to 90°, make
sure to add the set screw indicated for this purpose.

4- Secure The Cables

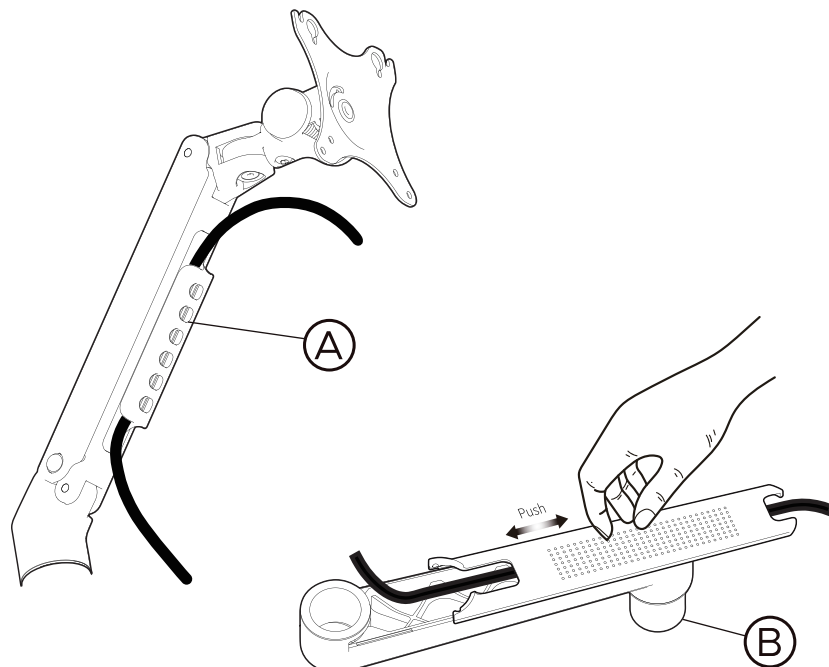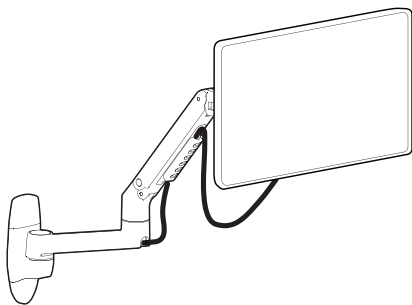

4A. Take your monitor cables, push them, and route them through the sliding covers of the arm to keep them organized and hidden.



5- Adjustment Step

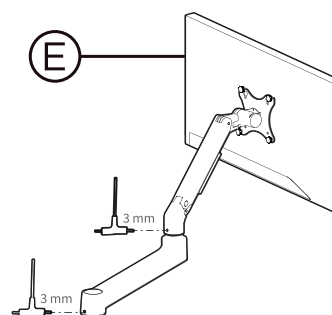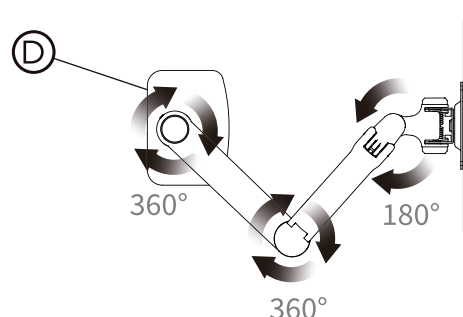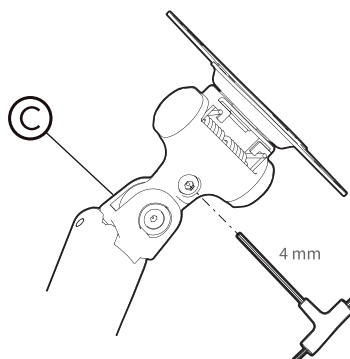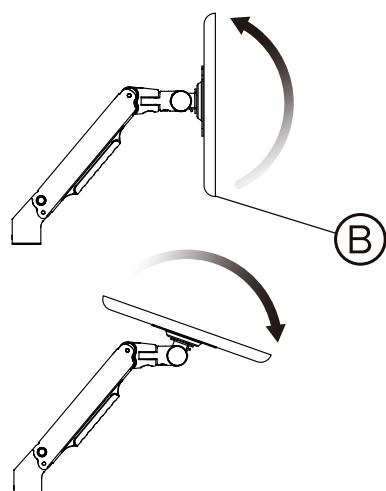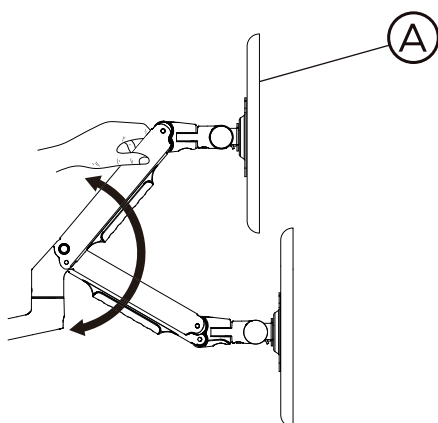

5A. Join and tighten the main pieces using the included Allen keys (3 mm or 4 mm) as detailed in the instructions.

6- Adjust Monitor Arm's Tension

As a safety warning, do not install or adjust the arm until the monitor is completely installed.

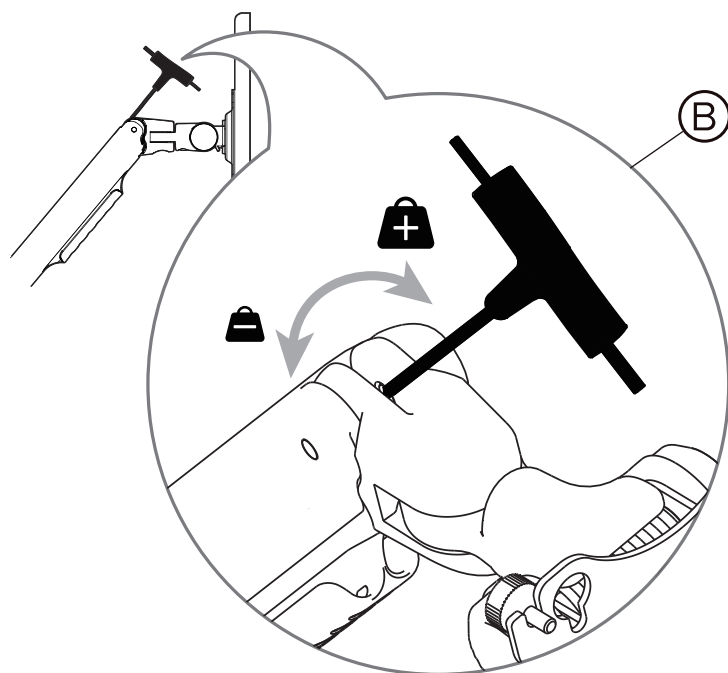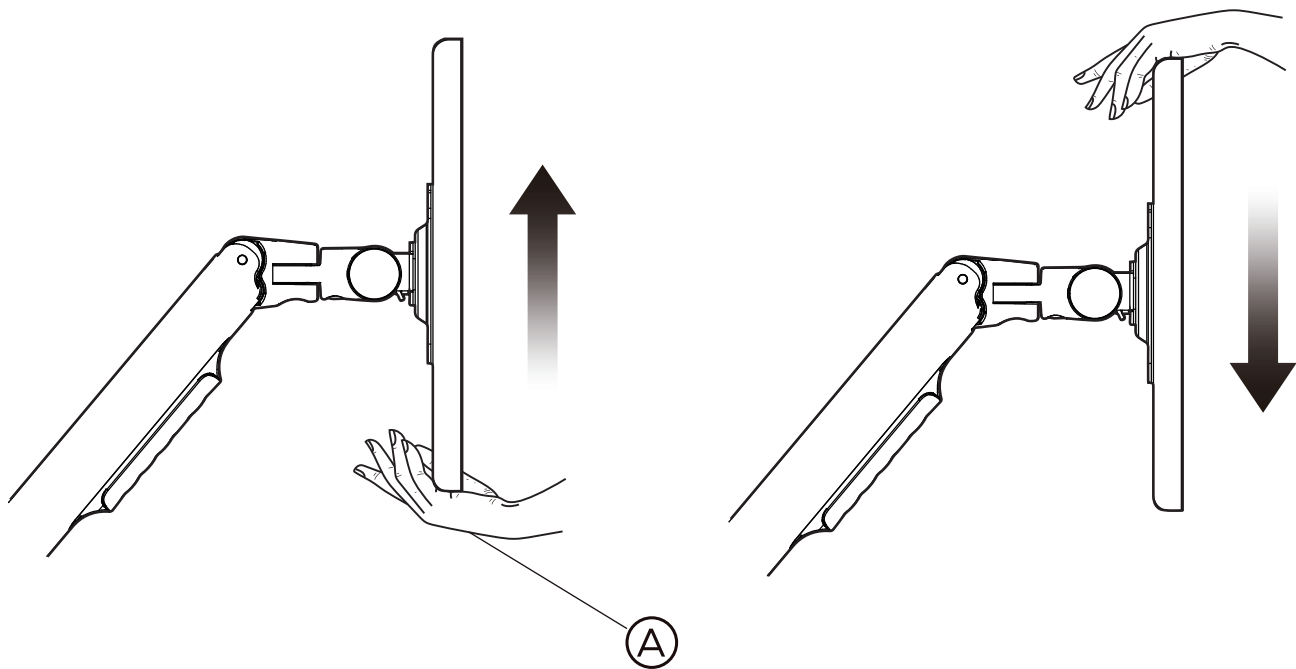

6A. Before adjusting the tension, please confirm whether the monitor is fixed firmly to the mount.

6B. Adjust the tension to properly support the weight of your screen, making sure not to exceed the weight capacity of 7 to 25 lbs (3 to 11 kgs).