





Dual Display POS Desktop Wedge Stand for Tiny PC w/ USB Hub and Faceplate

ADD-POSWDS


INSTRUCTION - MANUAL

CONTENTS:

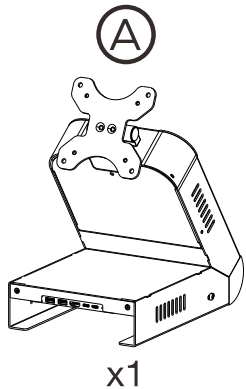


INSTALLATION:



1. Setting Up Tiny PC into Kiosk

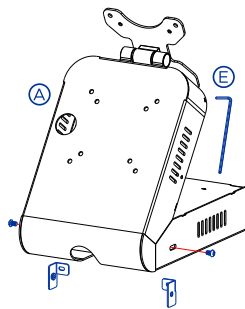

****Tiny PC for illustration only, and NOT INCLUDED**


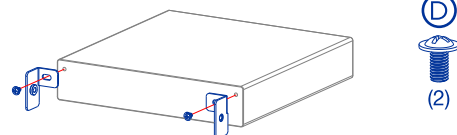


1A. Remove screws at the side of the kiosk to remove L shape brackets that are now going to be placed at the back of the tiny pc to secure it in place inside the kiosk as shown above.

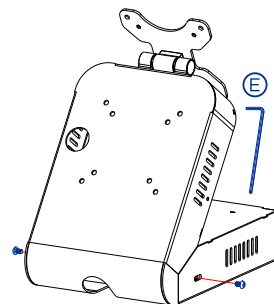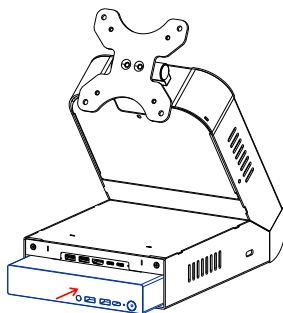



1B. After brackets are secured insert the tiny pc into the bottom compartment of kiosk, then secure it in place with the provided screws, as shown above.

2. How to Setup Back monitor:

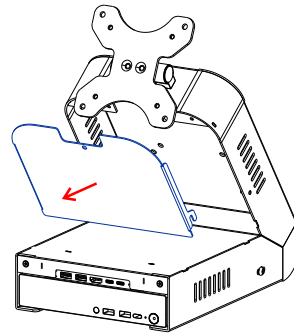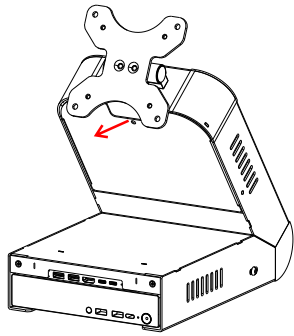



****Monitor for illustration only,
and NOT INCLUDED**

2A. Remove plate at the front of kiosk.

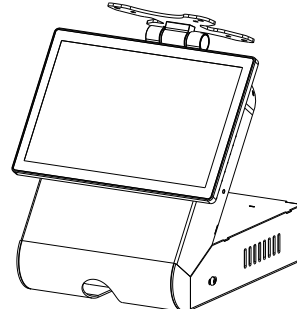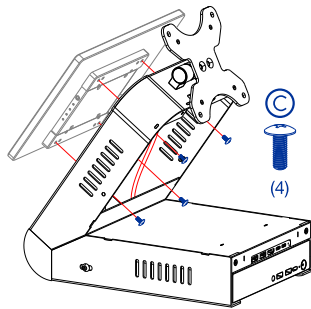


2B. Place monitor aligned to VESA holes and turn in screws (C) until securely tightened

3. How to Setup Top monitor:

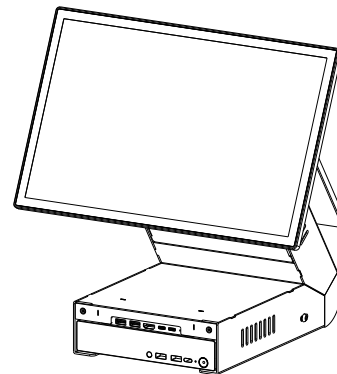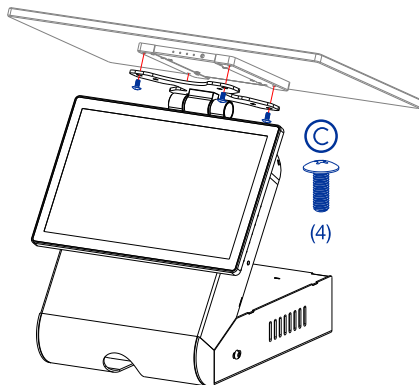


3A. Place monitor aligned to the top VESA holes and turn in screws (C) until securely tightened. Shown above

4. Cable Management:

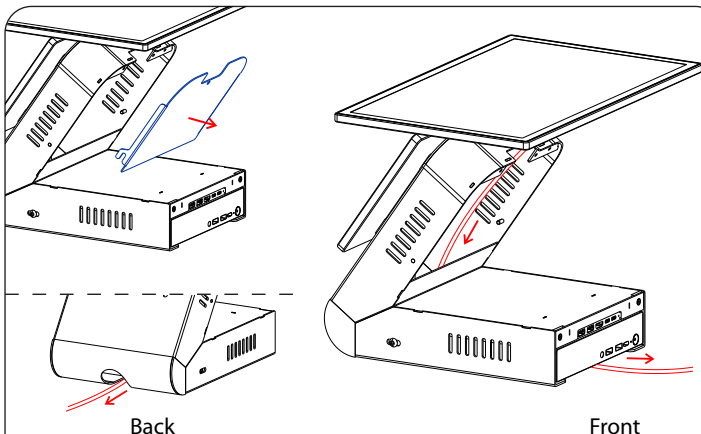

4A. Remove front plate then route cable from monitor through the inside of the kiosk and fish it out from the back or front as shown above.

5. How to Change Front Port Cover Plate:

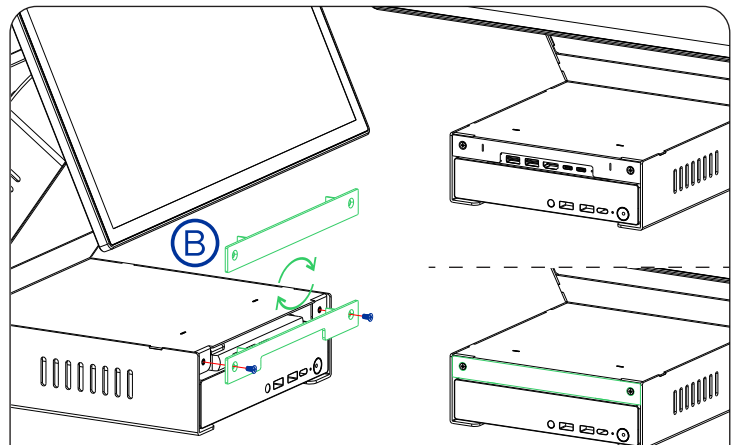

5A. Locate the plate (B) if you want to have the ports covered and turn in screws to secure it in place. Do same process to have it opened.