




Self Service Kiosk with Printer Compartment and Storage (Black/White)


ADD-SSKPCB / ADD-SSKPCW

INSTRUCTION - MANUAL

CONTENTS:

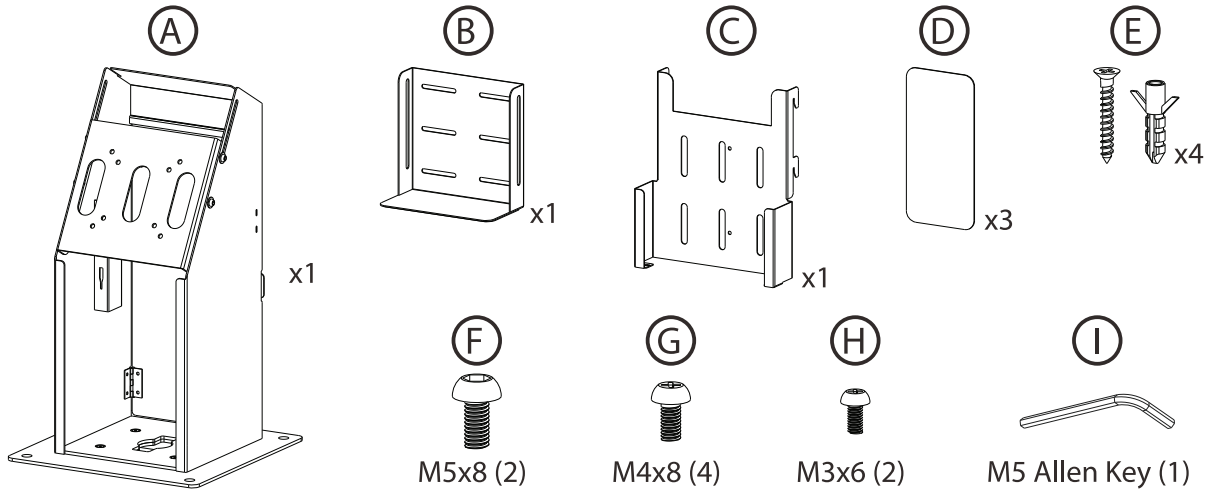

1. Mounting to Tabletop

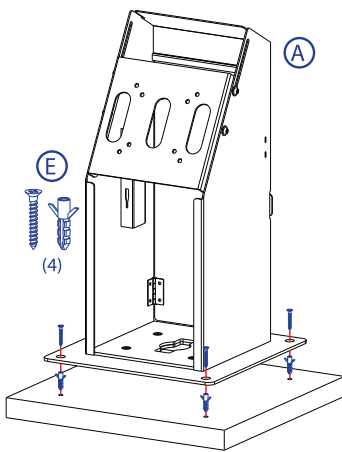


1A - Align mounting holes of kiosk base plate (A) to mounting surface. Mark the 4 locations with a pencil (not included) or the sort. Place kiosk to the side. Using a power drill (not included) pre-drill the 4 locations. Use the same length and diameter for the powerdrill as the included nail and anchor (E).


1B - Insert Anchors at the four locations as illustrated above.

1C - One again, align the kiosk base plate mounting holes (A) with the holes of the drilled locations. Rotate in the 4 screws (E) until firm and secure.

2. Setting Up Mini CPU Holder

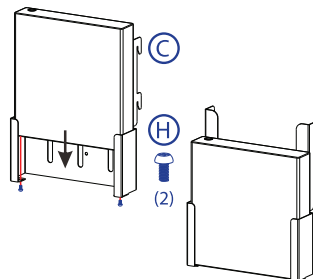


2A - Identify the mini CPU holder (C) and insert the MINI CPU (not included) by sliding in as illustrated with the front facing up. The mounting holes on the back of the mini CPU should align with the two mounting holes of the holder. Rotate the two screws (H) using screwdriver tool (not included) until securely fastened.

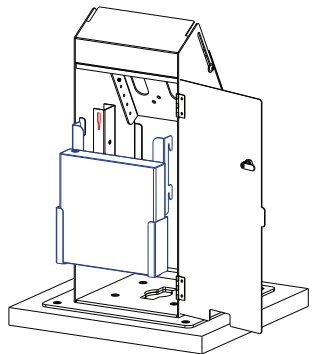

2C - Take the now attached mini CPU holder and mini CPU and hook onto the two side brackets. Insert into the holes and it'll shift down to securely hold.

3. Setting Up Printer and Press Plate

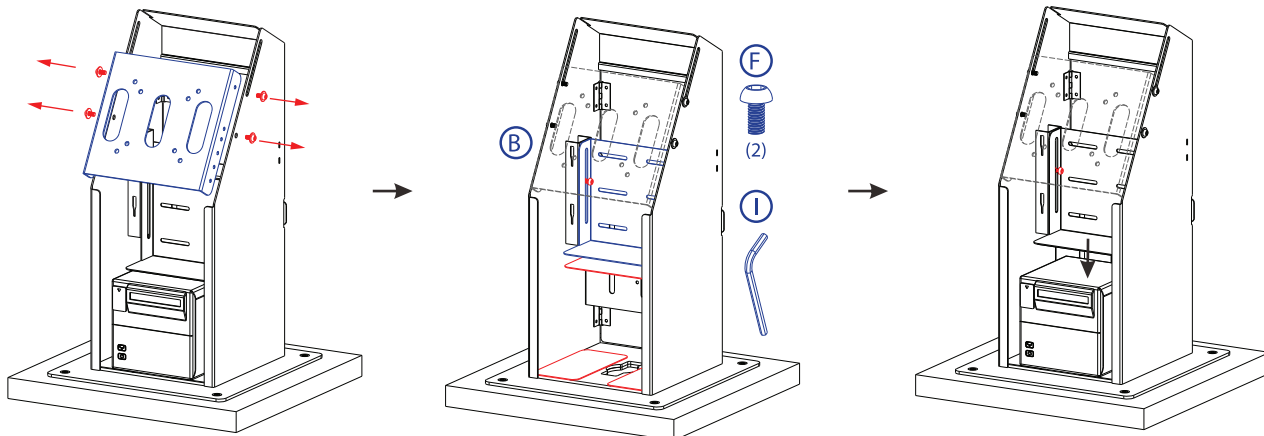

3A - First remove the VESA plate by removing the four edge screws using the provided tool (I). Two screws on each side as illustrated above.

3B - (OPTIONAL) - Add the silicone sheet adhesives at the red highlighted locations above. Two on the bottom of kiosk and one under the horizontal bottomside of the press plate. This is just to ensure some additional padding and protection.


3C - Next insert your printer device (not included) at the very bottom of the kiosk as shown above.

3D - Afterwards, insert into the kiosk the press plate (B) and find the two edge brackets. Align the press plate (B) mounting channel as illustrated above with those bracket holes. Have the bottom horizontal lip rest on the top of the printer. Then take the two screws (F) and rotate them into the edge brackets. One on each side. Rotate until securely fastened. The location just depends on how tall your printer device is and where the press plate rests on it. **Cable route out the hole directly below or out the small opening on the back door.**

4. Attaching VESA Bracket with Display

4A - Align the back VESA holes of your display (not included) with the VESA holes of the mounting plate. Rotate in four screws (G) from behind using a screwdriver (not included) until securely fastened.

**Display can be mounted in portrait or landscape orientations. Length of the display and weight compatibility will need to be factored in to see if it will fit when combined with kiosk.

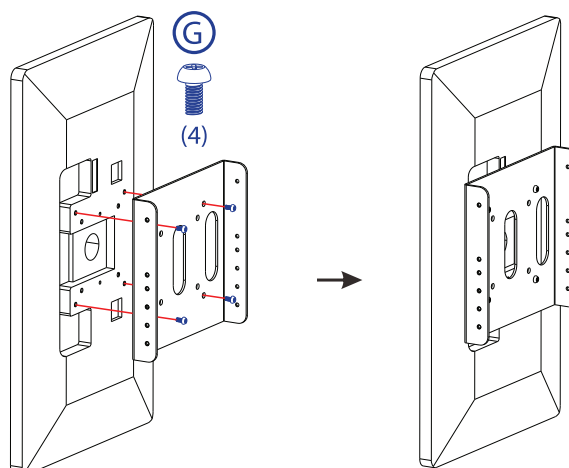

5. Attaching VESA Bracket + Display Back on Kiosk

5A - Take the now attached VESA bracket and display and align the mounting holes on each side as illustrated. Rotate them back on the kiosk using provided tool (I) until securely fastened. There are two on each side.

**If display was mounted in portrait orientation, you need to double check it wasn't too long it blocks the printer device. If it does, you need to try mounting in landscape view or use a smaller display size.

