




Desktop Display Mount with Speaker, Camera, and Equipment Attachment Points

ADD-CONF MOUNT


INSTRUCTION - MANUAL

CONTENTS:

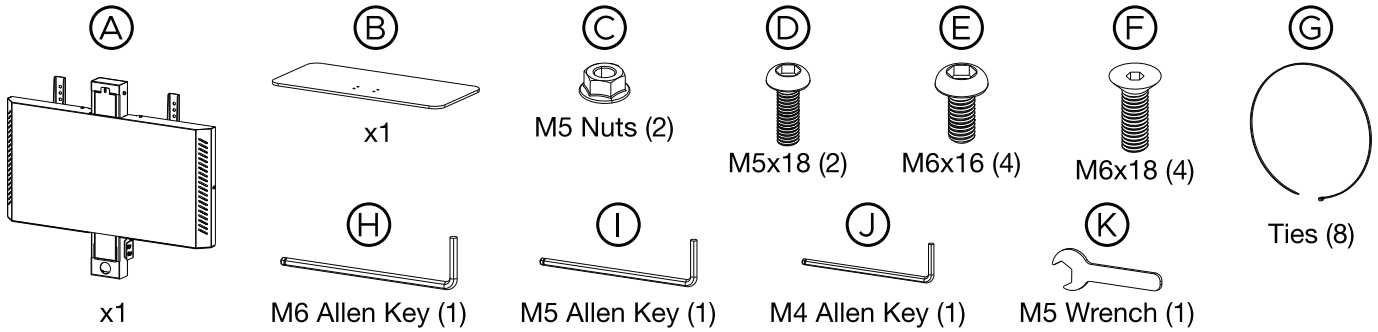


INSTALLATION:

1. Attaching Base to Stand

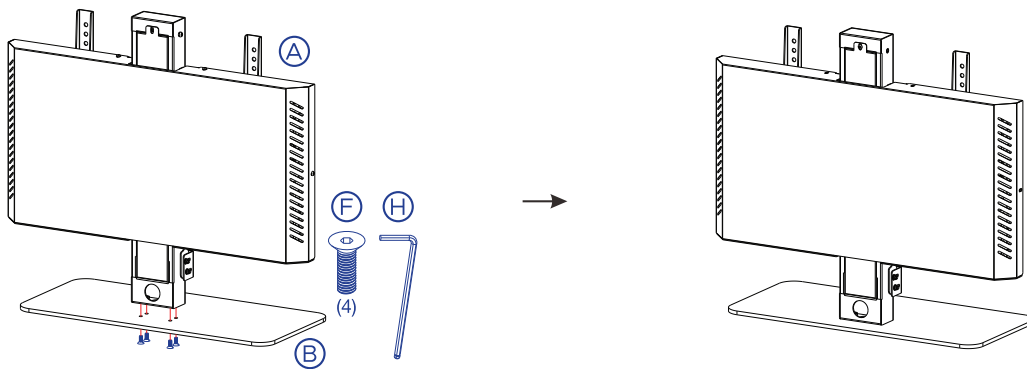


1A-Align stand (A) to mounting holes on baseplate (B). Secure baseplate to stand using screws (F).

2. Removing Back Cover

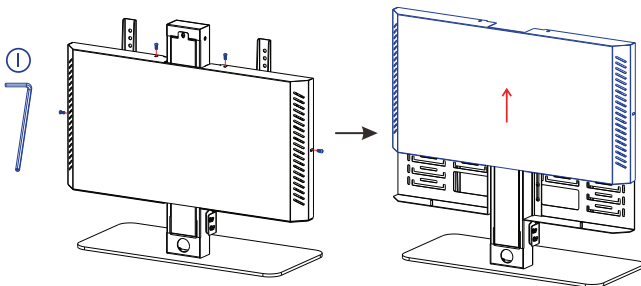


2A-Remove four screws along the perimeter of the back cover and slide cover up to release.

3. Remove Center Pole Back Cover

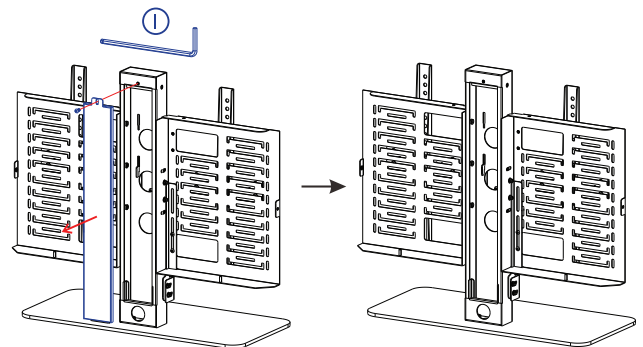


3A-Remove screw from top of cover to access the interior of pole.

4. Height Adjustments

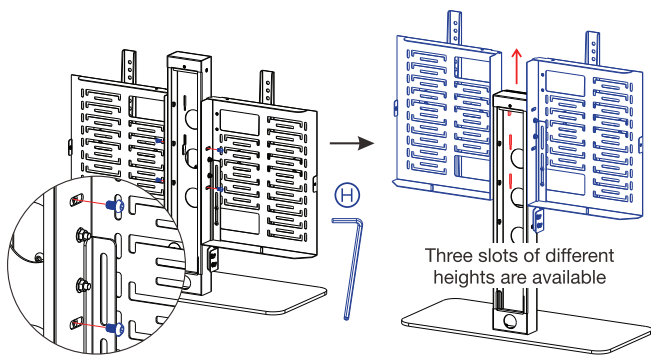


4A-Remove highlighted internal screws and adjust mounting bracket to desired height.

5. How to Remove Bracket Panels

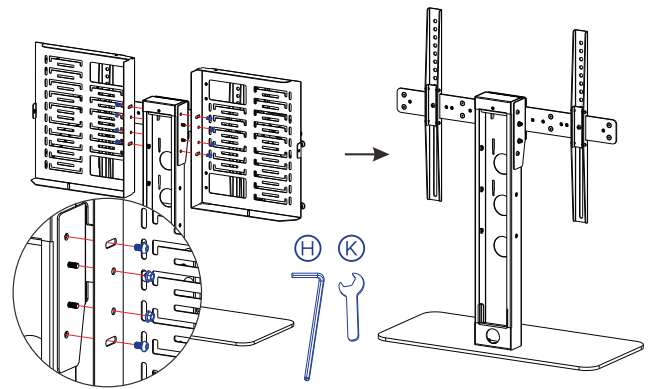

5A-Remove highlighted internal screws and bolts to remove equipment brackets from center pole.


6. (Optional) Setting up Stand and Speaker

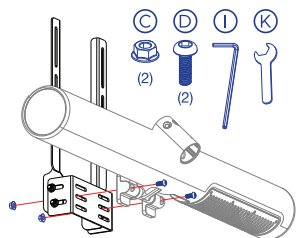

6A-Attach the speaker (not included) to the bracket with the provided hardware and tools.


***Speaker shown for illustration and not included*

REMOVING SPEAKER BRACKET

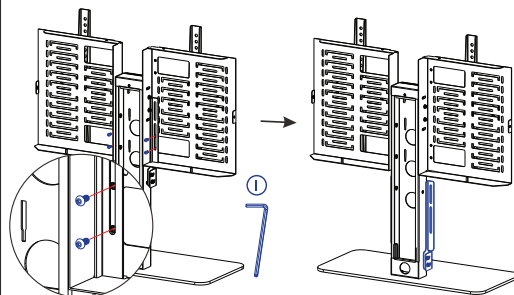


6B- Remove the optional speaker bracket by removing the highlighted screws on either side

WHEN ATTACHING SPEAKER ABOVE MONITOR

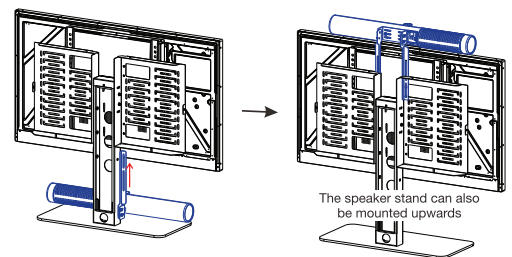

6C- Mount the speaker above the display by removing and reinstalling the bracket on the top of the mount.


7. How to Adjust Monitor Brackets

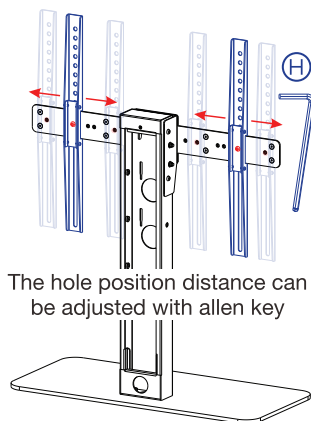

The hole position distance can be adjusted with allen key


7A- Adjust monitor mount spacing by loosening highlighted screws and sliding VESA brackets in or out. Once adjusted, re-secure by tightening screws.

8. How to Attach Monitor

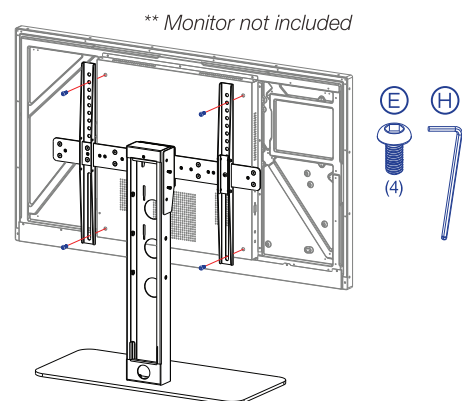


8A- Use available hardware to secure the display to VESA brackets

9. Cable Routing

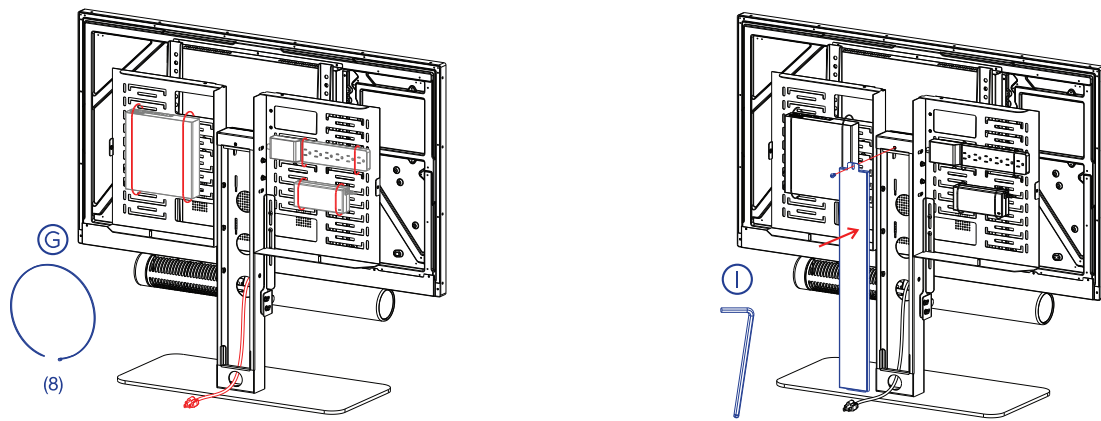

9A- When all devices have been properly attached to storage bracket, route all wires through the middle post through the openings as shown above. Make sure you have the end of cables out the circle cut out opening. Place the back cover on the center post and tighten screws on back using provided tool (I).

10. Attaching Back Cover

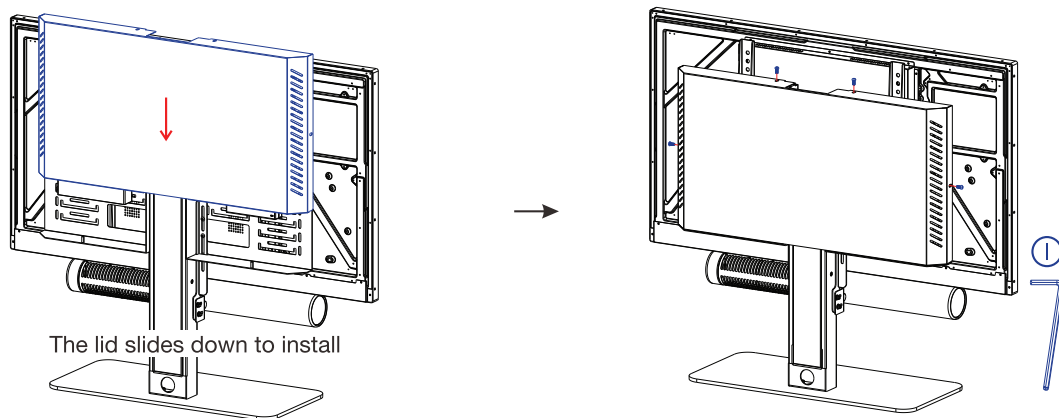

10A- Slide down back cover from above to properly secure into place. Rotate in four screws using provided tool (I) until secure.