




Stainless Steel Leg Clamp Mount

ADD-SSLEG


INSTRUCTION - MANUAL

CONTENTS:

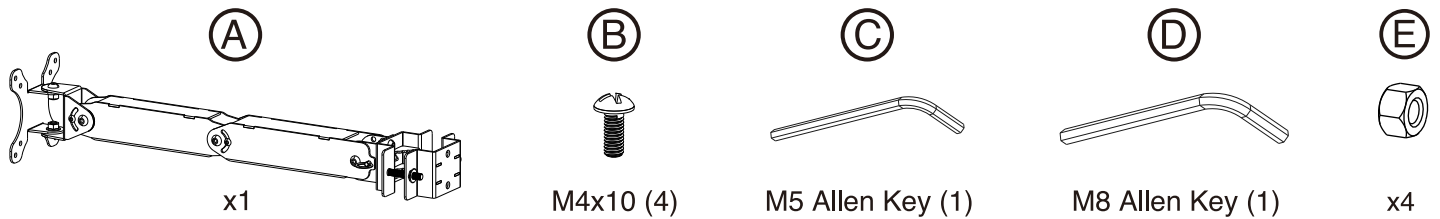

INSTALLATION:

1- When mounting to pole:

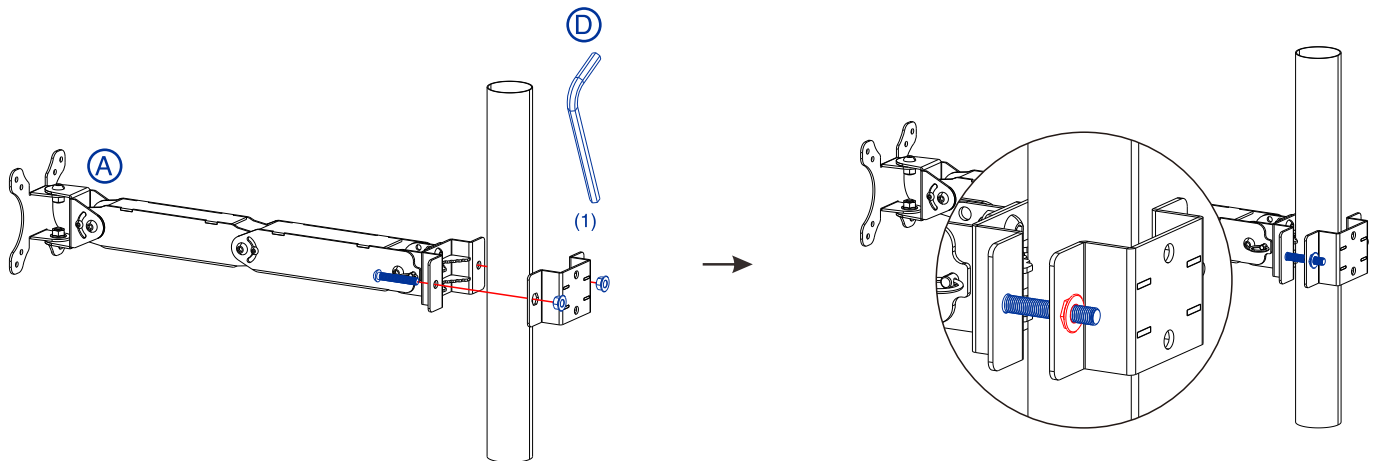


1A. Loosen and remove the integral two screws and hexnut combination using provided tool (D). Align the mounting holes of the back component of the mount with the front component on each side of the pole/leg.

1B. Rotate in the same two integral screws with the hex nuts on each side using the same tool (D) until securely tightened around the pole/leg.

2- When setting up enclosure:


***Enclosure shown for illustration purposes and not included*

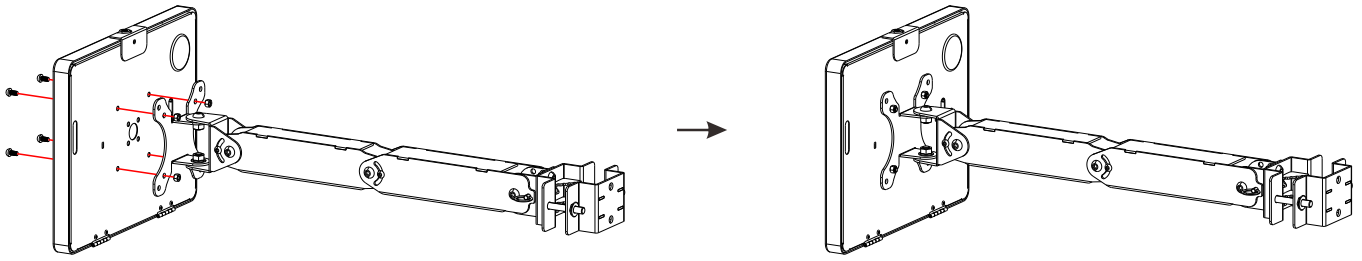

2A. Align VESA mounting holes of enclosure of VESA compatible device with the VESA holes of mounting plate of the leg clamp mount. Rotate in screws from the front (B) while holding hex nuts (E) from behind the VESA mounting plate as shown above using screwdriver tool (not included). Rotate until securely tightened.

3- Setting up adjustability:

***Monitor shown for illustration purposes and not included*

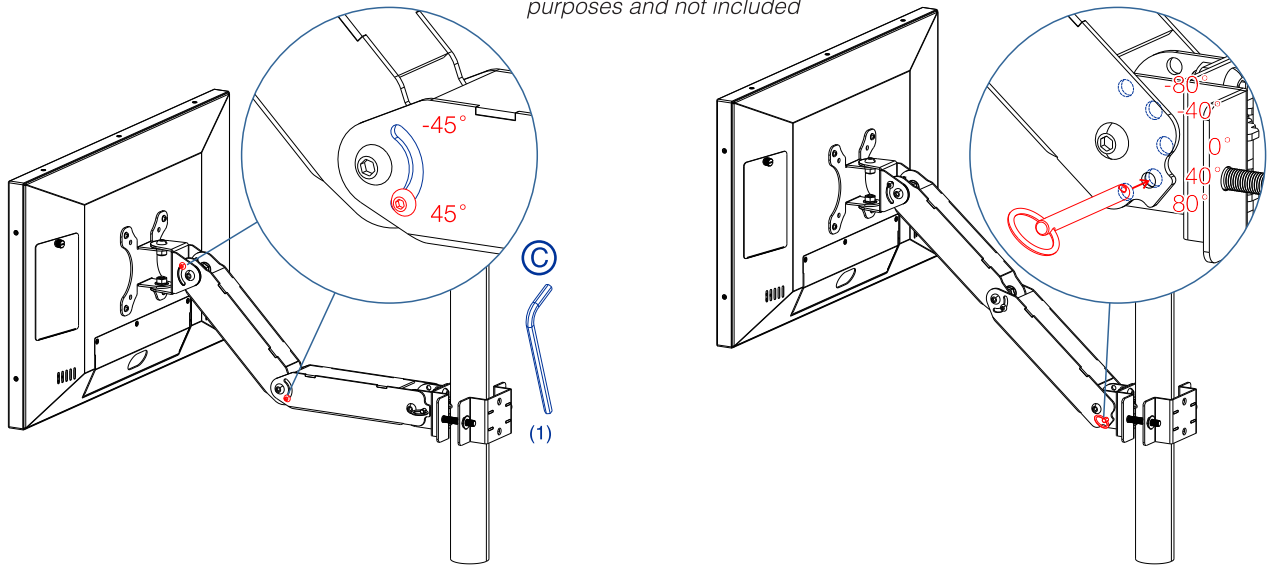

3A. Identify the mid-joint and the front-joint as illustrated above. There is a curved channel with locking screw to set the desired tilt and positions. Using provided tool (C), loosen the locking screw to be able to adjust within the range. Slide to desired setting, then use same tool to lock it in place.

3B. Identify the back-joint as illustrated above. Pull out the locking key component when needing to adjust the position. There are 5 options to choose from. Once desired setting is select, re-insert the locking key component to set.