








Aluminum Security Vehicle Mount

AUT-CFVMS

INSTRUCTION - MANUAL

Package Contents:

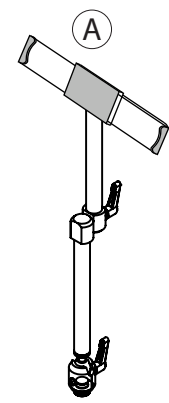


Vehicle Seat Rail
Clamps Bundle


Intructions:

1. Assembling Rail Clamp Footing of the Vehicle Mount:

Because each vehicle is different, you will need to determine which included seat rail clamp is best for you.

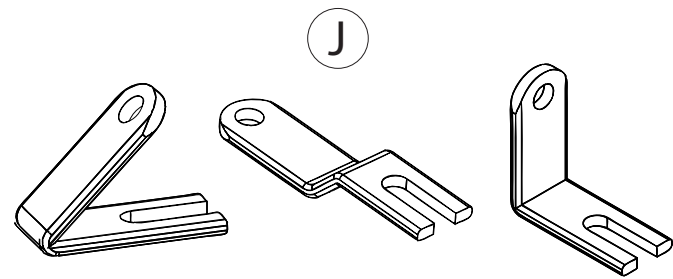


1A. Choose the clamp base (J) with the angle that matches your needs.

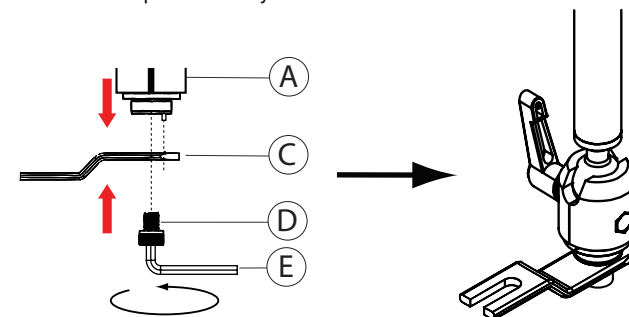


1B. Align the preferred clamp (C) and the vehicle mount (A) and rotate in screw (D) with provided allen key tool (E).

2. Installing Vehicle Mount to your Vehicle Seat Rail:

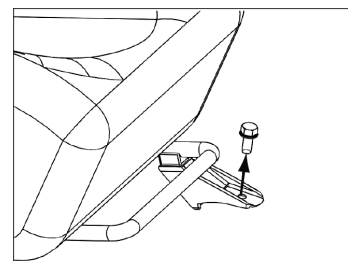


2A. Loosen the bolt (not included) of the seat rail.(seat and rail not included)

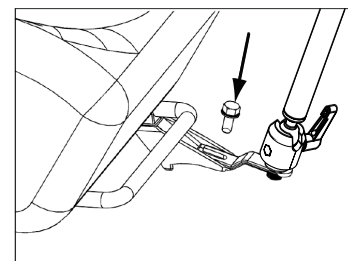

2B. Install the full assembled vehicle mount on the seat rail and screw the bolt back as shown. (Tool not included)

3. How to Adjust the Joints:

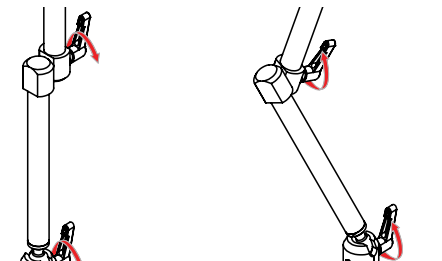


3A. Twist the screw knobs counter-clockwise to release the connection. Adjust the arm to your any preferred position & rotate back clockwise until securely tightened.


4. Inserting a Tablet into Holder



4A. Identify the key hole of the lock on the back of the holder. When inserting the key, if you rotate it to the right, it unlocks and rotating to the left locks.

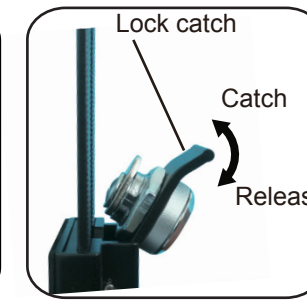

4B. When locking the holder, you need to make sure the lock is pressed forward into the holder, the insert key and turn and remove key. When unlocking the holder, you need to first unlock with key, then pull out to release it to access the tablet.

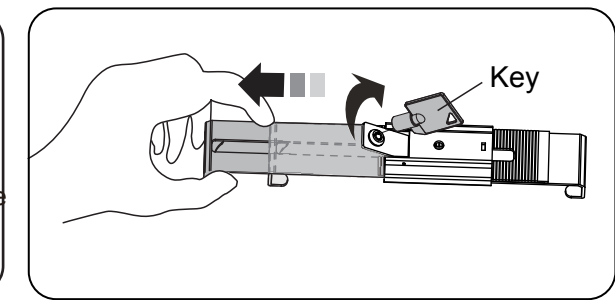

4C. After you have unlocked the holder, you can adjust the arms and place it over the corners of your tablet. Make sure you are not placing the holder over the corner that has the camera on the tablet. That would block your camera for usage. Push the arms back onto the corners until firmly set and secure.



4D. Once you have the corners adjusted to your tablet. Push the lock into the holder. Then use your key as illustrated and rotate to the lock position and then remove key. Tablet holder does not support tablet cases, so be sure to remove case if on your tablet.