




VersaGuard Twist Lock Protective Tablet Case and Dock with Wireless Inductive Charging

CASE-VG-TLICI11 / CASE-VG-TLICK11 and CASE-VG-TLICDOCK


INSTRUCTION - MANUAL

COMPONENT CHECKLIST

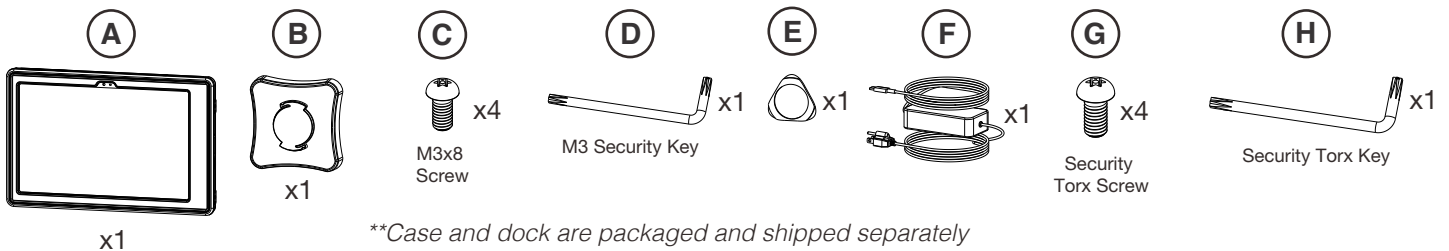

INSTRUCTIONS:


1. Installing Device into Case

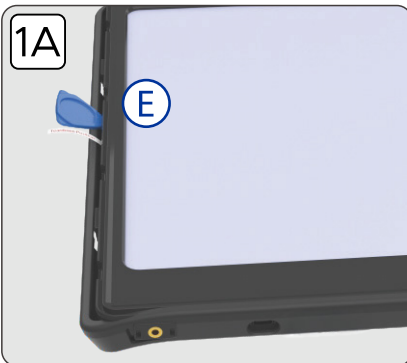


1A. Remove the outer silicone sleeve from the internal hardshell case using the provided pick tool (E)



1B. Use the provided pick tool (E) to undo the clips around the perimeter of the hardshell case. If security screws are installed on the rear corners of the case, remove these first with the provided M3 security key (D) before undoing the case clips. Once all of the clips are undone the top part of the hardshell case can be removed.

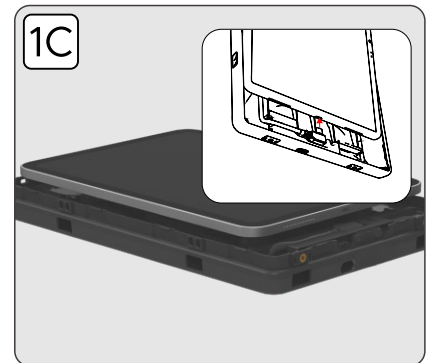


1C. Before inserting your tablet into the case, connect the internal USB-C cable in the case to the charging port on your tablet. After the cable is connected, insert the tablet into the back part of the hardshell case, making sure that the cable connecting your tablet to the case is neatly routed below the tablet.

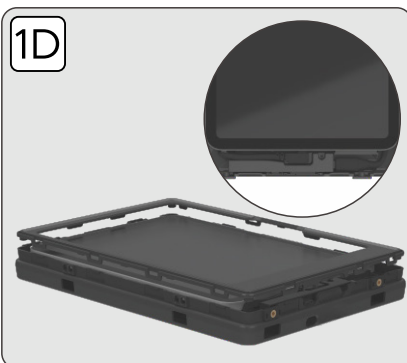

1D. Once the tablet is installed, the top of the hardshell case can be reattached to the bottom of the case. Make sure to check that all case clips around the perimeter are properly secured.




1E. Optional: install security screws (C) in each corner of the backside of the hardshell case with the provided M3 security key (D).

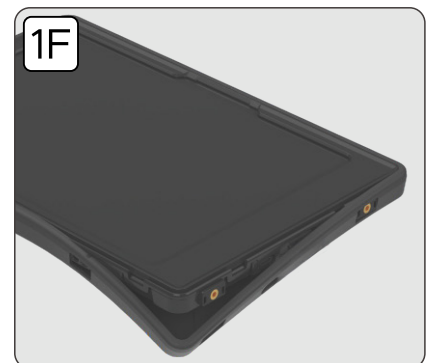

1F. Reinstall the external silicone sleeve onto the hardshell case.

2. Install Dock onto VESA Compatible Mount

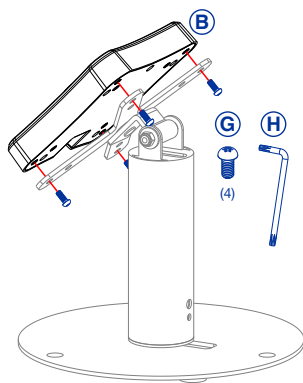


****Stand not included**

****Case and dock are packaged and shipped separately**


2A. Align the mountings holes of the dock to the VESA compatible mount. Attach the dock to the mount from behind using the provided screws (G) and tool (H).

3. Connect the Dock to Power

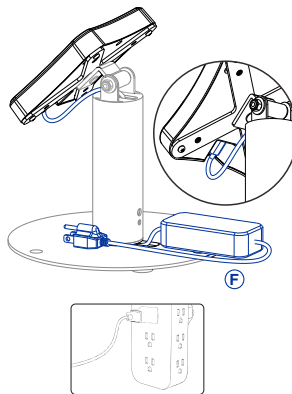


3A. Connect the power supply (F) to the USB-C port on the dock and then plug the power supply into a power outlet.

4. Connect Case Directly to USB-C

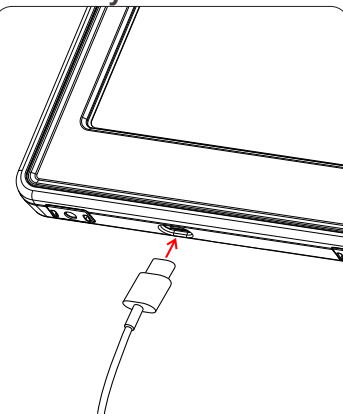


4A. Connect the USB-C cable to the USB-C port on the case then plug the power supply into a power outlet.

5. How to Secure the Case to the Dock

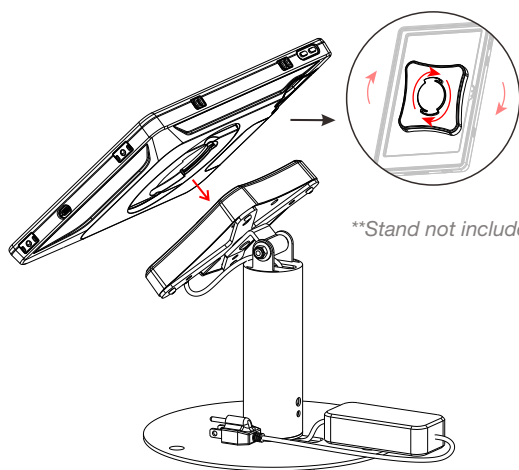


****Stand not included**

5A. Align the back of the case with the center of the dock. Internal magnets will guide the case onto the dock and initiate charging.

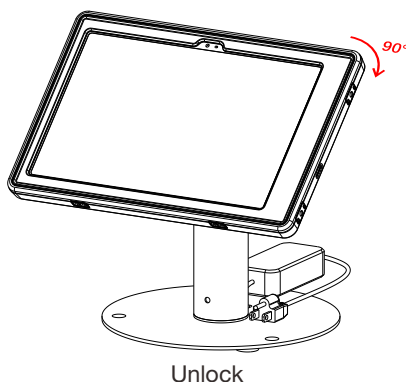


5B. To lock the case onto the dock, turn the case 90 degrees clockwise until it clicks.

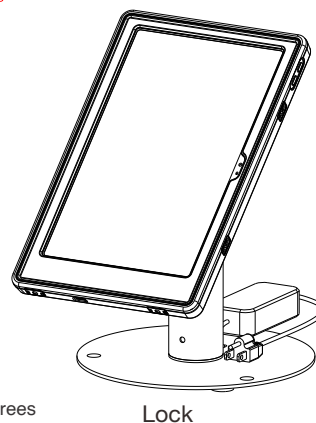

5C. To unlock, rotate the case 90 degrees counterclockwise

6. Elastic Hand Straps

6A. Insert your hand under the elastic hand straps to securely hold the case when not docked

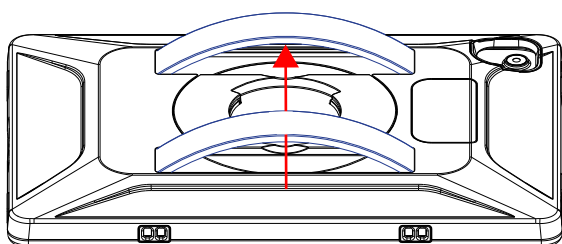

7. Attaching Shoulder Strap to Case Anchor Points (Shoulder Strap Not Included)

****Shoulder strap not included**

- Locate the anchor points on either side of the case
- Unclip the shoulder strap ends and feed the loop through the anchor point on the case
- Feed the clip side of the shoulder strap end through the loop on the opposite side of the anchor point. Pull the clip side to tighten the strap end.
- Clip the shoulder strap into the shoulder strap end piece.
- Repeat steps 6A through 6D on the other anchor point.

