




Charging Station Floorstand for 12 Devices Both USB-C and Lightning

PAD-VCHARGE12


INSTRUCTION - MANUAL

CONTENTS:

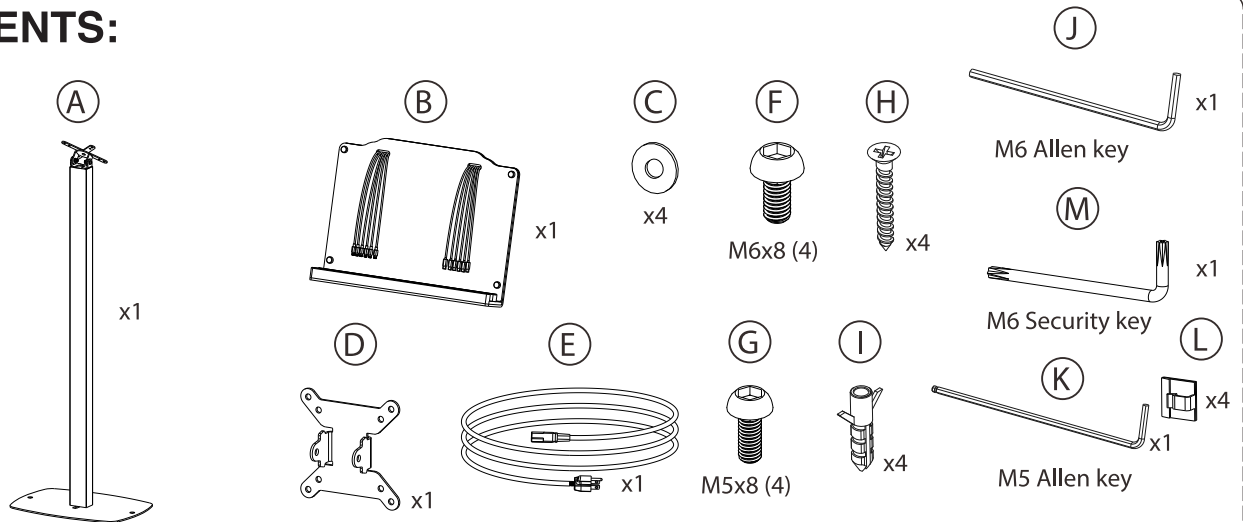


INSTALLATION:

1-Swapping the VESA Bracket on Floor Stand

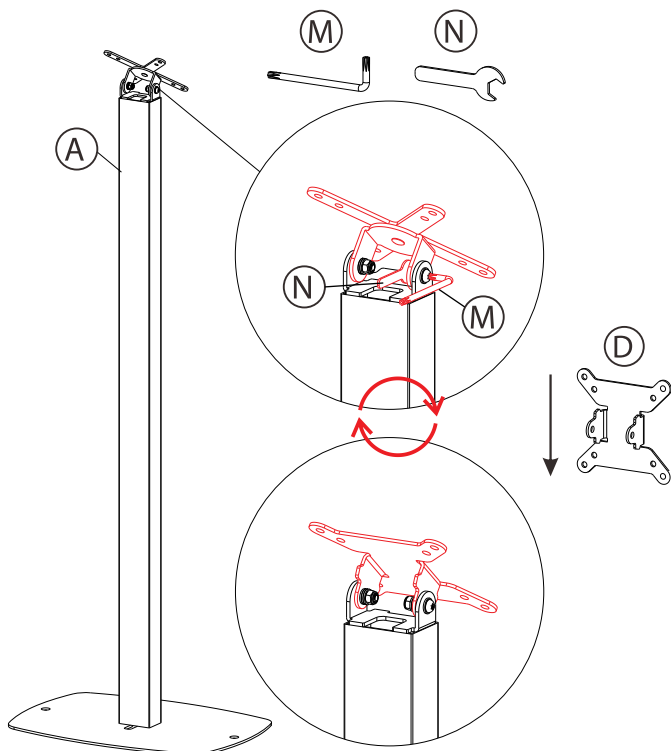


1A. Using the allen key tool and wrench tool (M & N), remove the existing screws on the X-VESA. Then put on the new VESA bracket (D) and re-apply screws and washers. The new bracket will be compatible with the VESA charging station.

2-Setting up VESA Bracket Angle

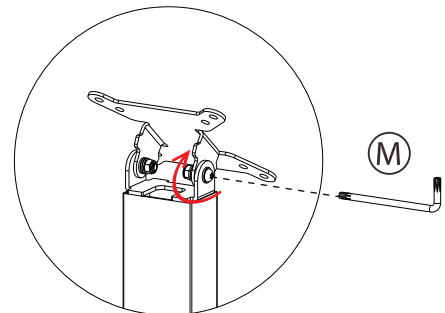


2A. Adjust the tilt angle of the newly attached VESA bracket to the desired setup. Using provided tool (M), tighten the screws on both sides of the VESA joint until securely fastened.

3-Attaching the Charging Station to the Floor Stand

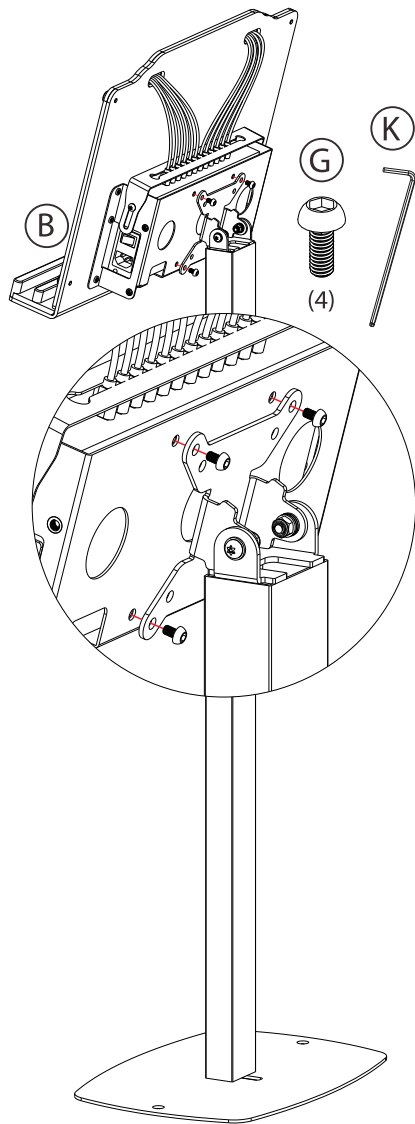

3A. Align the VESA holes of the back bracket with the VESA holes on the back of the charging station. Using provided tool (K), rotate in 4 screws (G) from behind through both VESA holes until securely fastened as illustrated above.


4-Cable Routing Down the Floor Stand

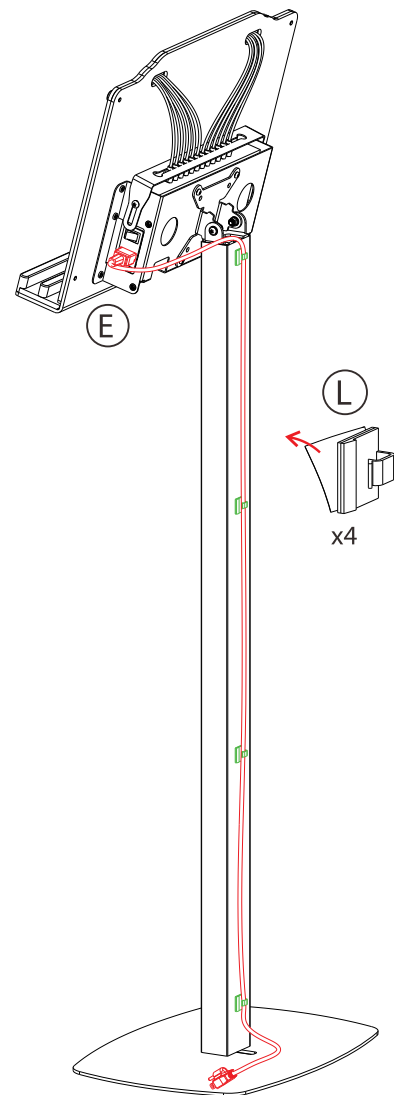

4A. Find the cable routing clip and remove the adhesive backing. Place on the floor stand back side as illustrated with the clip part on the right. Repeat the process for the next (3) clips and move down the floorstand as shown.

Then, take the cable attached to the charging station and fish it down the backside and insert into all the different clips as you move down the floor stand.

5-Adjusting the Charging Station Angle

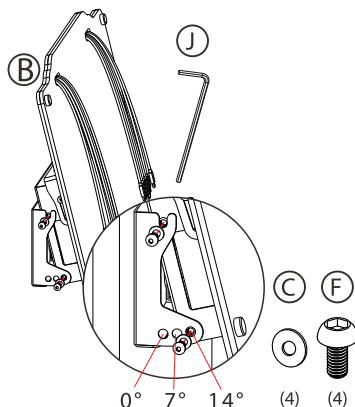

5A. Locate the screws (F) on both sides of the charging station. There will be two on both sides. Loosen the top screw on both sides. Do not completely remove. Then remove the bottom screw and tilt the charging station to the desired preference angle. There are (3) holes total as illustrated. Insert screw (F) in one of the holes with the washer (C). Rotate the screw back until tightened using tool (J) until securely fastened. Tighten the top screw as well on both sides too until securely fastened.

6-Charging Devices

6A. When you are finished with the setup, there will be 6 lightning charging cords and 6 USB-C charging cords. Plug into your compatible device and rest on the ledge of the charging station.

