



Quick Release Security Kiosk with Wireless Inductive Charging Case

KIT-ICCTKS109


INSTALLATION - MANUAL

Caution: For proper results, please make sure your device is properly aligned with the inductive charging plate.

Caution: Please do not place or store the product on or near high-temperature areas like heating devices, open flame, or in hot cars in extreme heat.

Caution: Please do not place or store the product in or near water, steam, or in any wet, humid, or damp places.

CONTENTS:

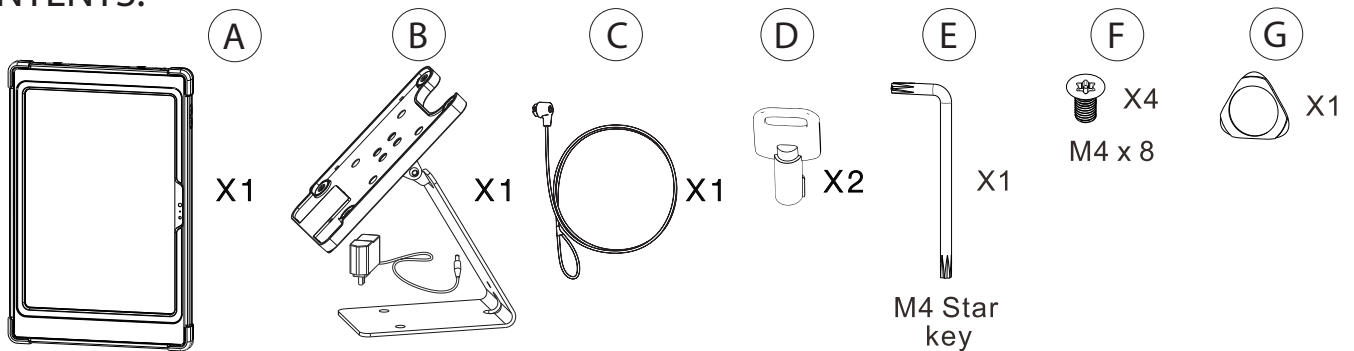

Power Supply:

Input : AC 100-240V 50/60Hz
Output: DC12V 1.5A
Rating power: 18W
Cable Length: 1.8M
DC Plug: 5.5*2.1mm male DC Plug

Inductive Charging Case:

Qi Standard: V1.2.4
Input: DC12V 1.3A
Output: DC5V 2.4A(Max.)
Rating Power: 15W
Efficiency: 80-85%(Max.)
Inductive Distance: 3-6mm

Input Socket: 5.5*2.1mm female DC socket


Output Plug: Apple Lightning Plug
Charging Time : 4-4.5 hours)

Environmental Requirements:


Operating Temperature for iPad: 32°F to 95°F / 0°C to 35°C
Nonoperating Temperature: -4°F to 113°F / -20°C to 45°C

INSTALLATION:


1. Inserting Tablet into Case

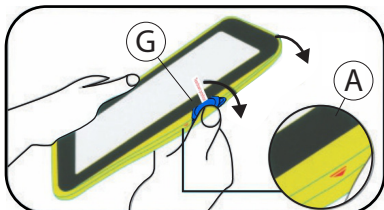


1A. Peel the external silicone sleeve from the internal hard case using component (G).

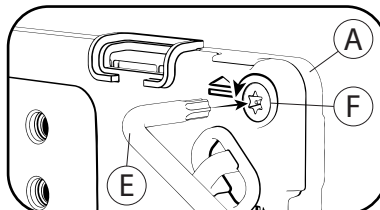


1B. Untighten the anti-theft screws F X4 with the included star key (E) to be able to open the case

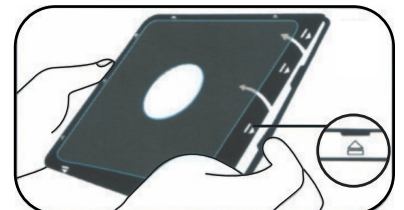


1C. To open case, apply gentle pressure to the small clips (noted on the diagram by arrows). The internal hard case will open when all four sides are unclipped.

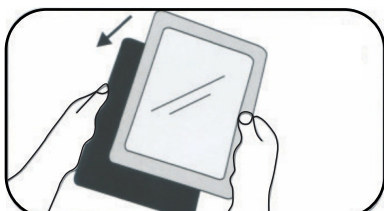

1D. Insert the tablet into the back portion of the hard cover.

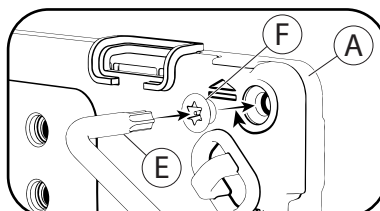


1E. Tighten the anti-theft screw with the included star key (E) if you want the case security.

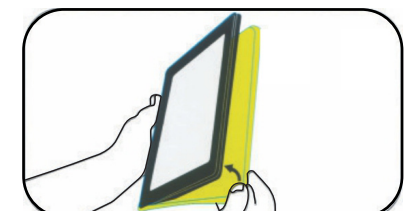


1F. Reinstall the external silicone rubber sleeve.


2. Docking and Charging the Tablet Device

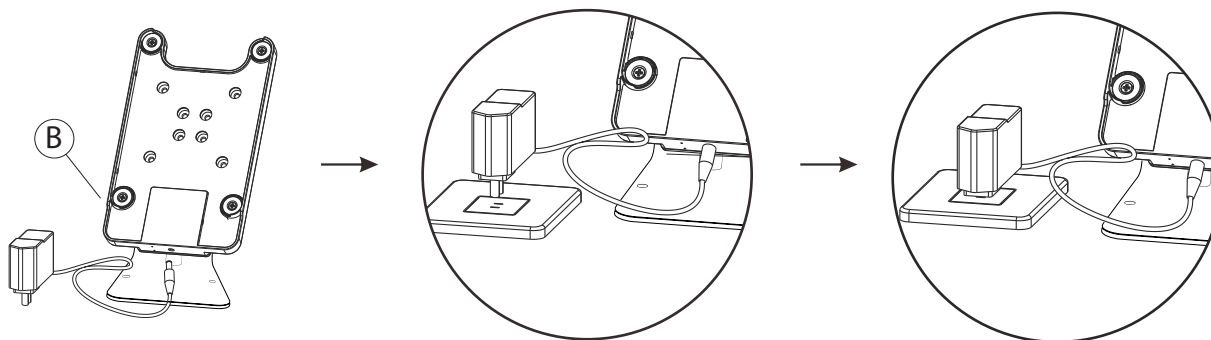


2A. Connect the AC/DC power supply to the charging plate as shown above.

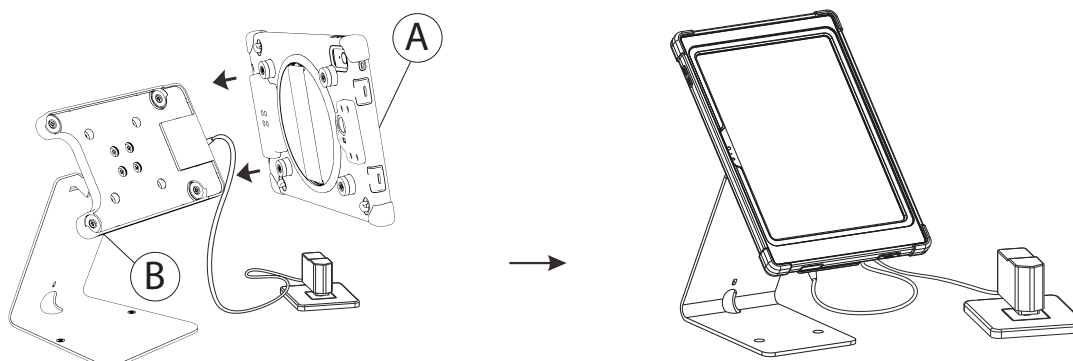

2B. Make sure that the charging case and the back charging plate are aligned properly. You should see a blue indicator lighting up on the back of the charging plate.

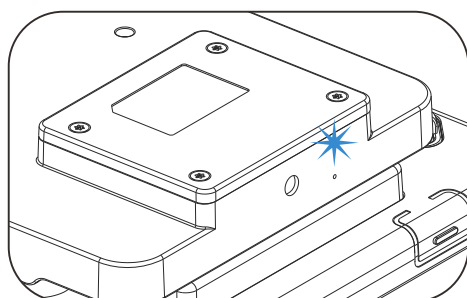


2C. The blue indicator light indicates that the tablet device is properly connected to the inductive charging plate.



2D. There should be a power level indicator on the tablet screen.


3. How to Setup Case Cable Lock Security

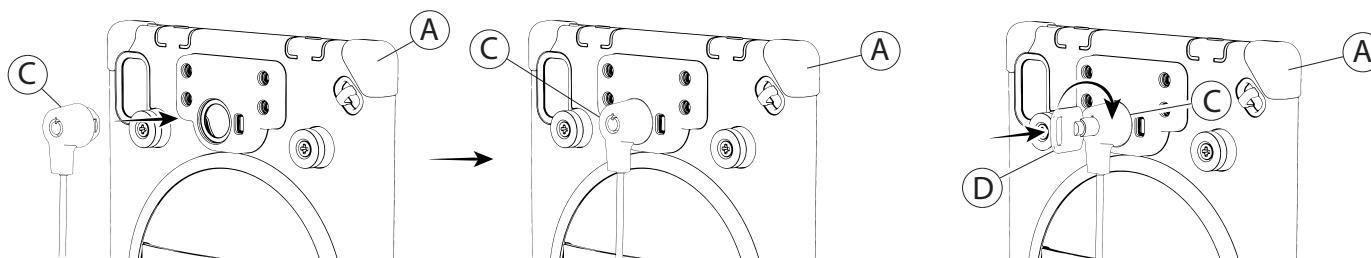

3A. Easily click-in cable lock (C) into circle slot (as illustrated above) in the security hub to secure device.


3B. To release cable-lock insert provided Key (D) into lock cable (C) and turn it clockwise then take out the cable lock.

4. How to Anchor Cable Lock

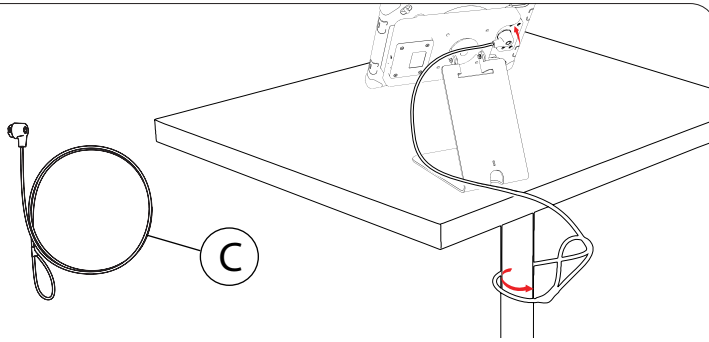

4A. Take the non-lock side of the cable and loop it around the leg of the table. Then take the circle cable lock and click-in into the security hub.

5. ADD-ON Option

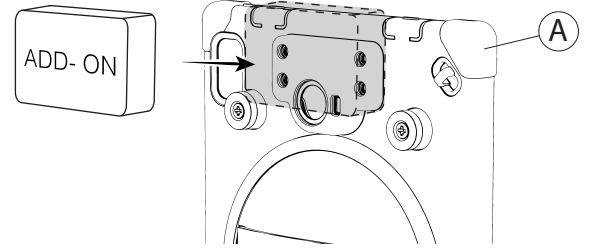

5A. Attach any compatible add-ons into threaded holes (x4) as needed, such as card readers, led lights, etc.