




VersaGuard Protective Pogo Charging Case with Single Unit Charging Dock

VG-CGD1U

INSTALLATION - MANUAL


CONTENTS:

(A)

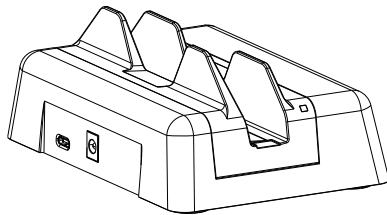


Dock Station x1

(B)

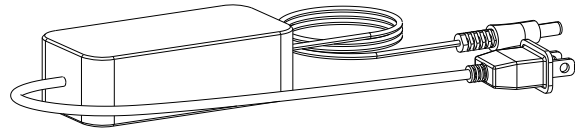


Power Cord x1

(C)



x1

(D)



x1

(E)



M3 x 8 (4)

(F)



M3 Anti-theft Key (1)

(G)





x1

***Tablet shown for illustration
and not included*

INSTALLATION:

1- Attaching Power Cord to Dock

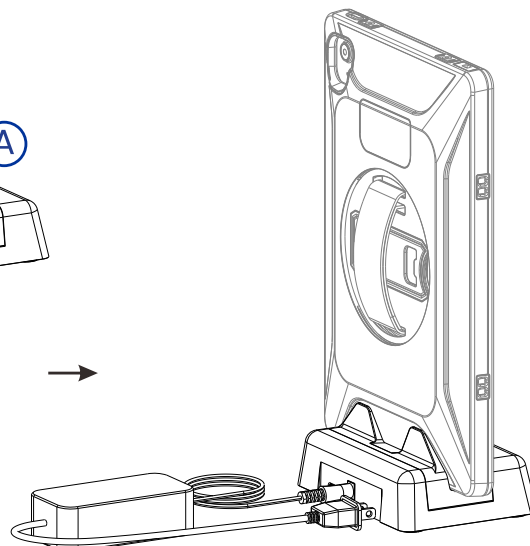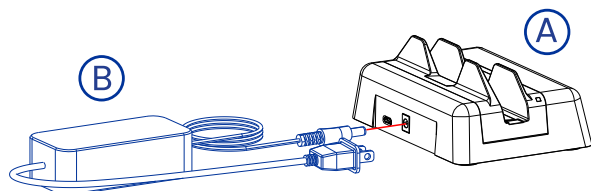


***Case shell not included*

***Device is not included*

1A - Plug the power cord (B) into the back of the docking station (A). Then plug the other end of the power cord (B) into an outlet. This powers the dock and gets it ready to charge the device when docked.

2- Red Light Indicator


****Case shell not included**
****Device is not included**

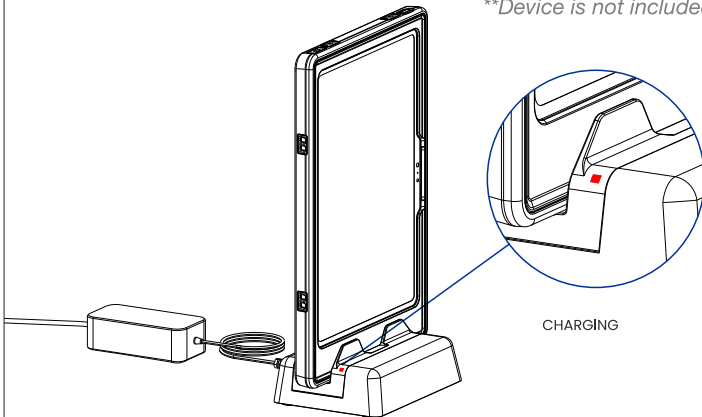

2A - Place your device onto the Dock. A red light will turn on, indicating the device is charging.


3- Blue Light Indicator

****Case shell not included**
****Device is not included**

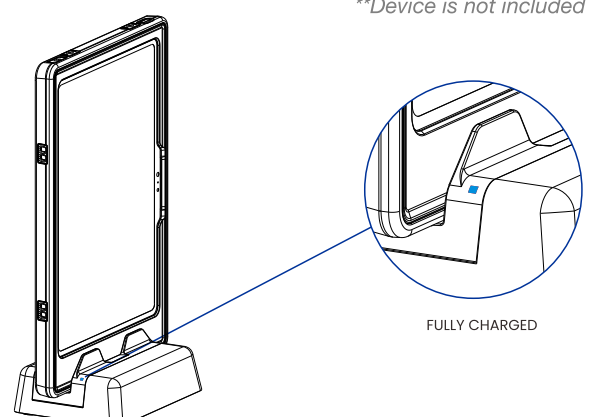

3A - When the blue light turns on, the device is fully charged and ready to use.


4. Setting Up Device into Case

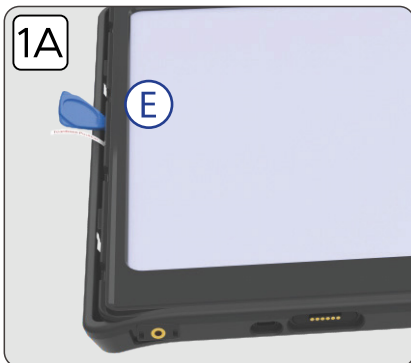


1A. Peel the outer silicone sleeve from the internal hard case using component (E). Do not take off completely. Peel back enough so you can see the edges of the hard interior case(A).



1B. To open case, first make sure the four specialty screws (C) are removed from the back of the hard case using provided tool (D). Then use your fingers or pick (E), to unclip around all edges. The internal hard case will open when all 4 sides are unclipped. Remove the top cover.

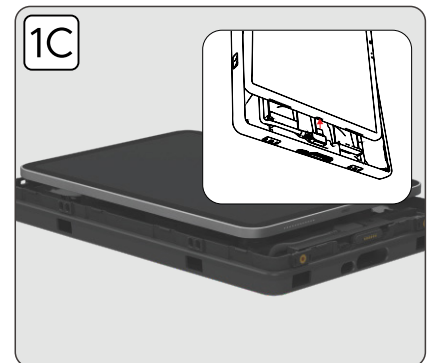


1C. Insert your tablet into the hard case. Begin by plugging in the right angle USB cable before inserting it into the case. After the cable is attached, insert your tablet into the case until everything is aligned and fitted in securely.

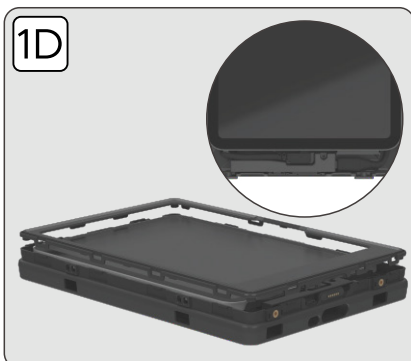

1D. Once the tablet device is inside, plug the internal charging cable into the power port of the device. Then re-clip back on the front hard cover on top of the hard case. Make sure to go around the perimeter and clip it all in.




1E. Tighten 4 security screws (C) with the included specialty allen key tool (D). Rotate until securely tightened for all four locations.

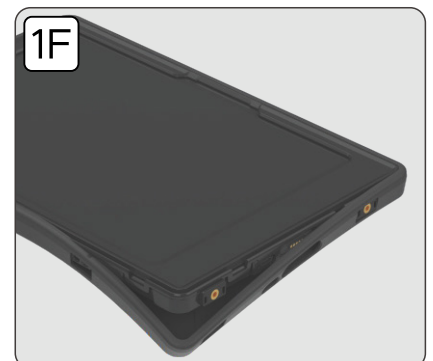

1F. Reinstall the external silicone rubber sleeve jacket. Start with one corner and work your way around. Using your hands, stretch the silicone jacket back over the edges to fit properly.


5. Setting the Cover in Tabletop or Handheld Mode

2A

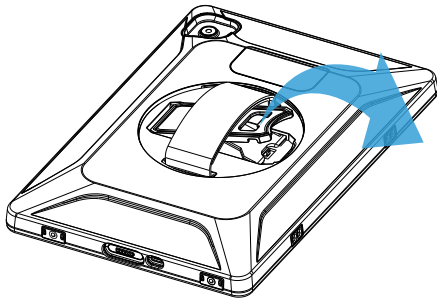

2A. Locate kickstand at case rear and fold out underneath strap.

2B

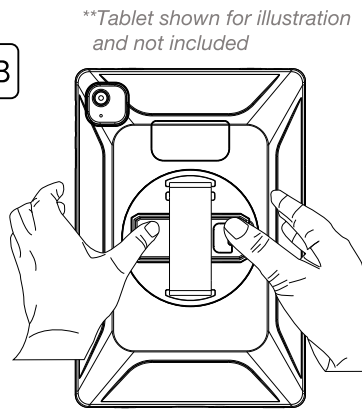


2B. Press kickstand back in to return to handheld mode.

6. Using Handstrap




3A. When kickstand is folded back in, insert hand into strap and push hand in all the way where the strap is near the middle of hand for a secure hold.



7. How to Setup Magnetic Mounting Plate



OR

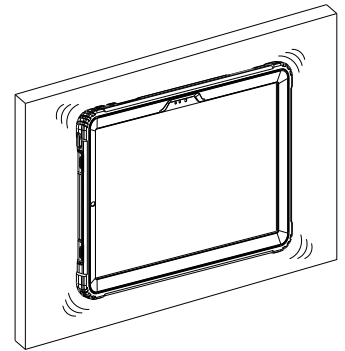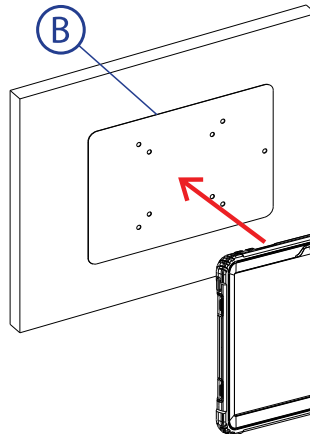


4A. Decide whether you're using adhesives or mounting the magnetic plate via VESA holes. If using adhesives, peel off the backing and firmly press against target surface until firmly attached. If mounting with VESA holes, using four screws and hex nuts (not included) and rotate into VESA compatible base.

4B. Place the case's (A) back on the magnetic plate (B) and simply let it grip hold when close and magnetically mount.

8. Attaching Add-Ons via Anchor Points on Case (Not Included)

****ADD-On strap not included**

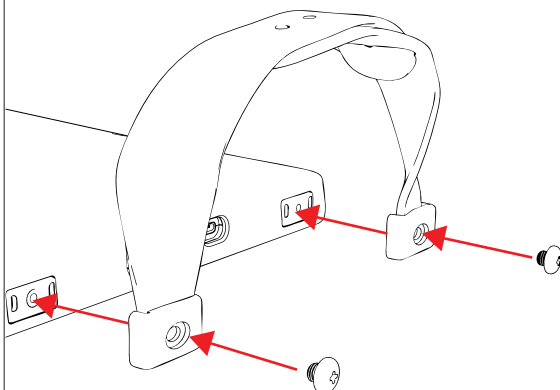

5A. Determine which side of the case you would like to attach the add-on strap (not included). Align the mounting holes as illustrated above. Rotate in the screws that come with the add-on on the side using screwdriver tool (not included). Rotate until securely tightened.

9. Attaching Shoulder Strap via Embedded Hook Anchor Points on Case (Not Included)

****Shoulder strap not included**

6A. Locate embedded hooks on edges of case. Determine if you want to attach the shoulder strap on a long side or short side of the case. Attach shoulder strap (not included) by threading it through the hooks and create a knot. Repeat for other end as well.

