




Spring Adjustable Floor Stand with Universal Security Enclosure

PAD-MSADFS


INSTRUCTION - MANUAL

CONTENTS:

***Disclaimer - There will be excess and spare hardware not used*



A (x1)



B (x1)
Sheet Bundle



C (x4)
M5 Nut



E (x4)



G (x1)




D (x4)
M5 x 10




F (x4)




H (x1)
M5 Allen Key

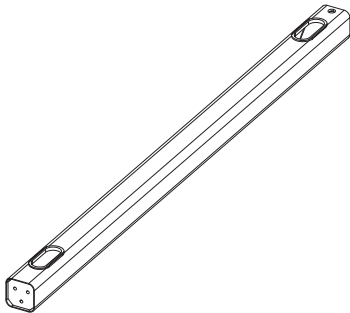

I (x1)




J (x1)



K (x1)



L (x2)
M5x10



M (x3)
M6x20



N (x1)
3mm



O (x1)
5mm (Long Type)




INSTALLATION:

1. Assembling Base to Body




Note: Keep the cable holes to the side facing up as shown

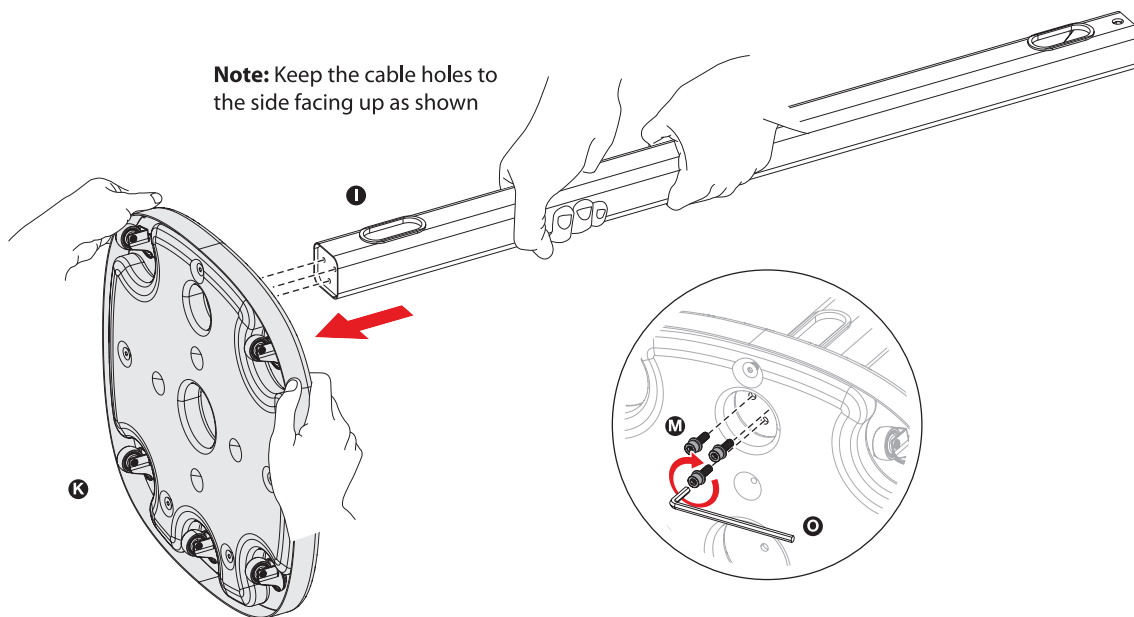


1A - Align the mounting holes at the bottom of the floor stand body (I) to the weighted base (K) mounting holes as illustrated above. Rotate in three screws (M) from below the base using provided tool (O) until securely tightend.

2. Removing VESA Plate Component from Arm 3. Attaching Articulating Arm to Body

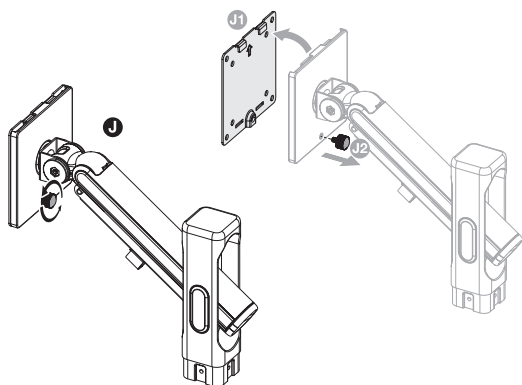


2A- Identify the knob on the VESA plate joint as shown. Rotate counter clockwise to loosen. Then lift up and out the front part of the VESA plate to remove and separate from the arm.

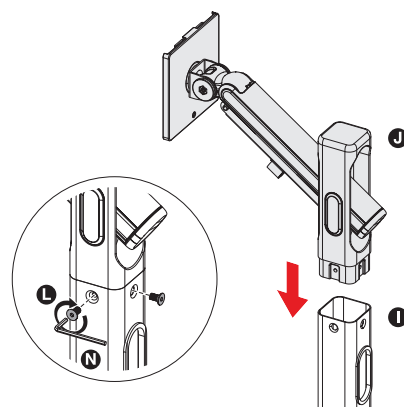



3A- Take the articulating arm component (J) and slide it down on the body (I) as shown. Rotate in the two screws (L) using provided tool (N) until securely tightened.

4. Attaching VESA Plate to Enclosure

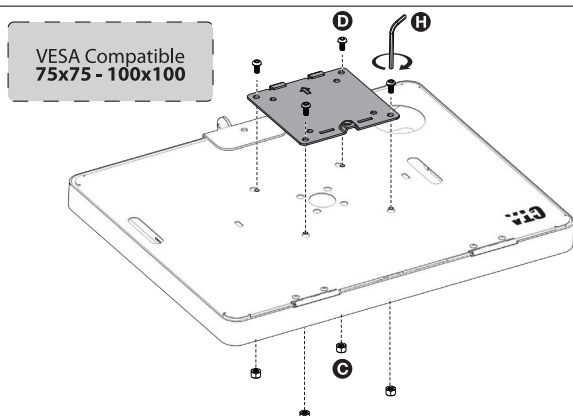

4A- Take the now removed front VESA plate component and align VESA mounting holes to that of the enclosure (A). At this point, make sure there is no tablet inserted. Rotate in four screws (D) from behind while holding four hex nuts (C) from the other side of the enclosure using your fingers. Rotate screws using provided tool (H) until securely tightened.


5. Attaching VESA Plate & Enclosure Back to Arm

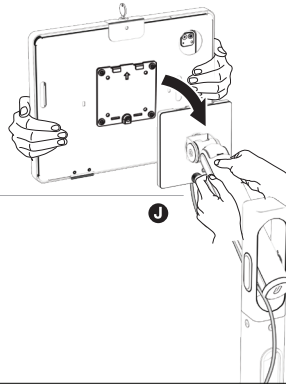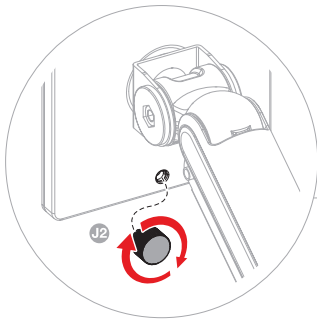

CAUTION: Do not release the monitor immediately after hanging and wait until you are sure it is stable in its position to prevent injury to personnel or equipment. If the arm rises or falls, refer to the step 7 for adjustment.

5A- Take the now attached device and front VESA plate component and slide downward back to the back VESA plate counterpart component on the articulating arm (J) to attach. Rotate the knob to tighten and secure as shown.

6. Cable Routing

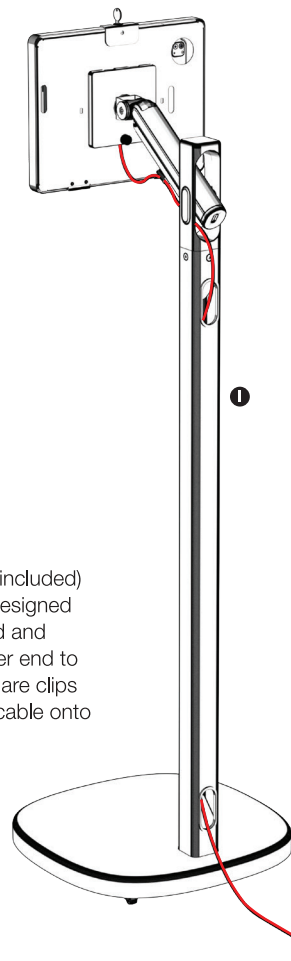


6A- Route your device cable (not included) through the body (I) and out the designed openings as shown. Take one end and attach to your device and the other end to the outlet or power supply. There are clips below the arm you can hang the cable onto at that area.

7. Height Adjustability & Tilt Adjustability





If the arms drops, turn the adjustment screw in the + direction until it remains in a horizontal position.
If the arms rises, turn the adjustment screw in the - direction until it remains in a horizontal position.

CAUTION: DO NOT over tighten the screws.

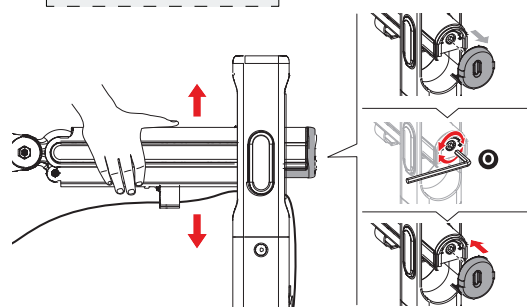

Before adjusting the spring tension and during the adjustment process, position and hold the arm horizontally as shown. Use the supplied Allen Key for adjustment. Ask for assistance should you require it.

7A- When adjusting the arm height, first remove the end cap at the back side as shown. Take the provided tool (O) to loosen the resistance. Adjust the arm up or down to desired location. Use the same tool to tighten and then place the end cap back on to set the arm.

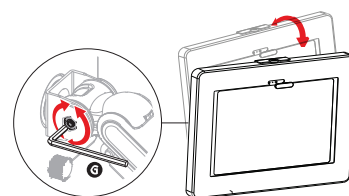


7B- When adjusting the device angle tilt, first loosen the VESA joint as shown to the left with provided tool (G) first. Use your hands and tilt forward or back to your ideal preference. You can also rotate it for portrait or landscape orientations. Make sure to unplug all wires first. Retighten the joint when all adjustments are finished to lock it in.




INSTALLATION: ENCLOSURE

8. Placing Tablet into Enclosure

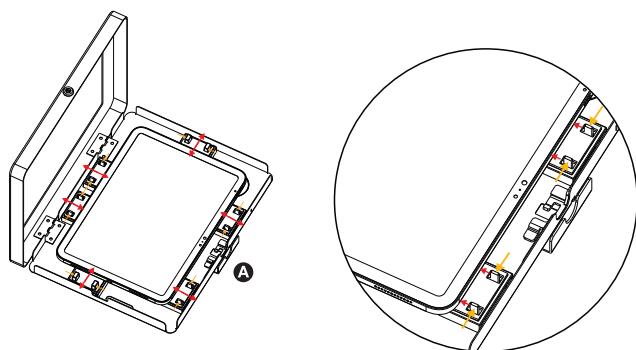

8A. Start by extending the adjustable clips all the way to the edge. As shown in orange, you pinch the two vertical pieces and then you can slide them inward or outward. You want to slide all of the as far out to the edge to start.


8B. Place the tablet in the center of the case. Now pinch the vertical pieces on each clip (shown in orange) and slide them inward towards the tablet. Make sure the vertical piece on each adjustable clip is right on the edge of the tablet securely and snug. You may need to go back and forth to make sure the tablet screen is as closely aligned to the enclosure cutout as possible.

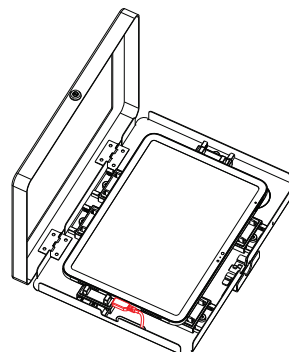

8C. Plug in the charging cable (not included) and route the cable out the back hole as illustrated.


9. Removing Back Covers

****Tablet shown for illustration only, NOT INCLUDED.**

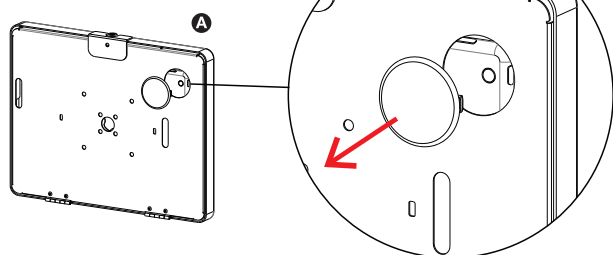

9A. When installing device into the enclosure, identify where the camera is. Then simply remove and pop out the cover prior to mounting or setting up tablet to properly expose camera.


10. Removing Front Cover

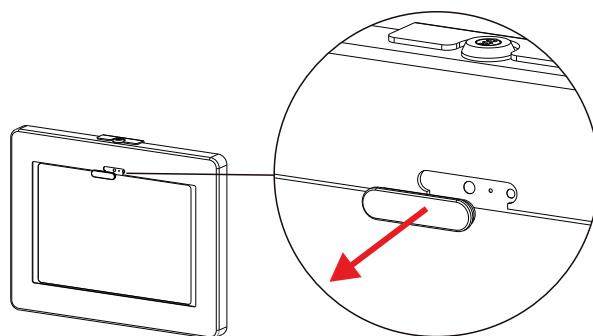

10A. Remove the cover as illustrated to use tablet with front camera exposed as needed.

11. Placing Black Sheet Insert into Enclosure

****Tablet shown for illustration only, NOT INCLUDED.**

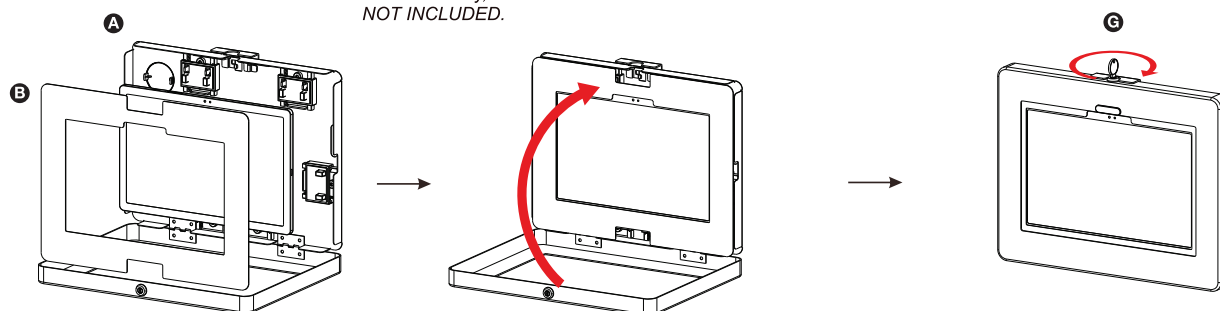

11A. Lay-in correct masking insert from bundle (B) as needed for the correct setup for your device.

11B. Once the tablet device is set up, close the front lid of the enclosure. Insert the key (G) in the keyhole at the edge of the enclosure. Rotate and lock it in place.

DEVICE & SHEET COMPATIBILITY LIST

SHEET 5 : Samsung Tab S6 Lite 2024, Lenovo Tab K10 2021, Lenovo Tab M10 Plus 2020
SHEET 4 : Galaxy Tab A8
NO SHEET NEEDED : For all other compatible devices