




Universal Security Enclosure with Honeywell 2D Scanner (Black/White)


PAD-PARAW2D / PAD-PARAWW2D

INSTALLATION - MANUAL

CONTENTS:



x1



Sheet Bundle



M5x10 (4)



M5 Nuts (4)



M5 Allen Key (1)




M4 Allen Key (1)




x1

INSTALLATION:


1- Setting Up Device and Sheet in Enclosure

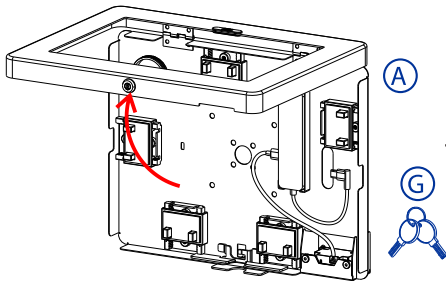


1A. Insert enclosure key (G) into the enclosure (A), unlock and open the front cover of the enclosure.

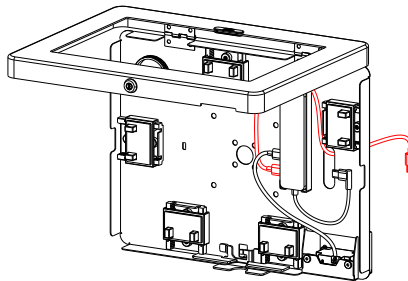


1B. Take the device cable (not included) plug one end into the hub and the other end out the back of the enclosure towards power source.

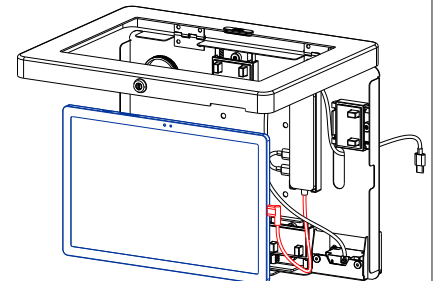

1C. Plug in the power and data cable as shown and highlighted in red above into the tablet power port. It should already be integral to the case and already plugged in.

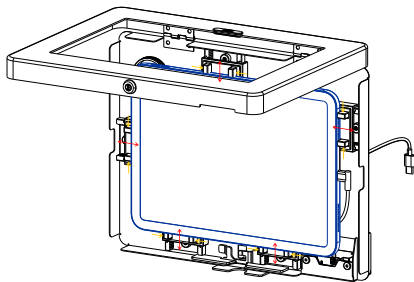


1D. At each of the adjustable clips around the edges of the enclosure interior, pinch the two vertical component pieces (shown in orange) and push all the way to the edge first. Lay in tablet as centered in the enclosure opening as possible. Simply push the clips back towards the edge of the tablet until snug and secure.

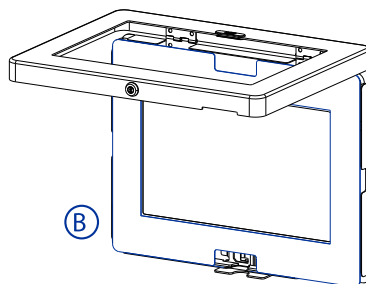



1E. If required, lay the sheet cover (B) over the tablet so there are no gaps between the enclosure opening and screen edges of the tablet. Close the enclosure front and insert key and lock and remove.

2- Removing Camera Cover

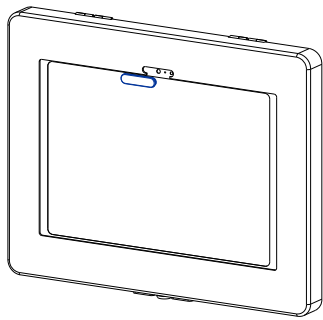

2A. Remove the rubber cover if you want to use iPad 10th Gen device with the front camera exposed.

3- Setting Up Enclosure to VESA Compatible Item

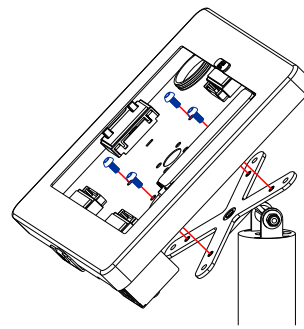

3A. When setting up enclosure with a VESA compatible item or counterpart, first align the VESA mounting holes. From the front side of the enclosure, rotate in four screws (C) using provided tool (E) until securely tightened.

