





Security Case with Kickstand and Anti-Theft Cable For iPad 10th Gen 10.9"

PAD-SCKT109


INSTALLATION - MANUAL

CONTENTS:



INSTALLATION:

1- Preparing case for tablet

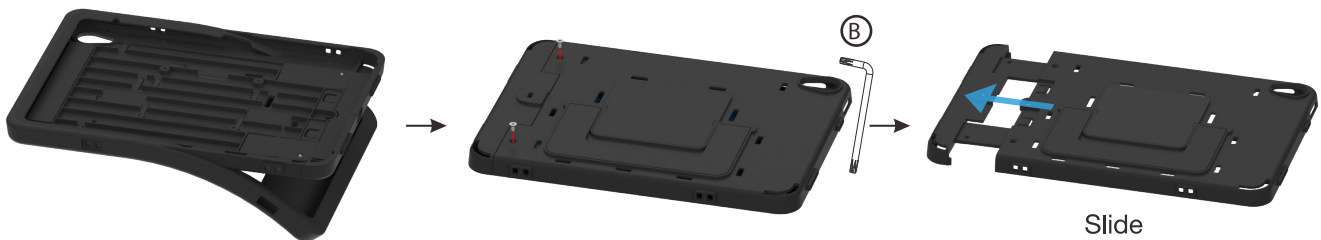


1A. Begin by removing the outer silicone jacket of the case (A). Using your fingers, peel away at a corner and continue to take off the silicone jacket in a clockwise or counterclockwise manner.

1B. Using provided tool (B), remove the two integral security screws shown at the locations above.

1C. Remove the bottom edge component by sliding it outwards as shown above.

2- Inserting tablet

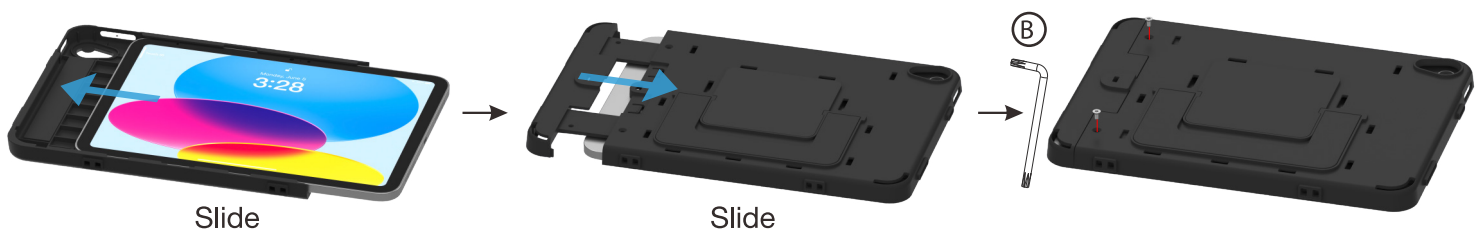

2A. Slide in tablet from below as shown. Make sure you have the tablet oriented correctly so that the back camera aligns with the camera opening.

2B. Reattach the bottom edge component by sliding it in from the bottom as shown above.

2C. Attach the two integral security screws at the locations shown above using provided tool (B). Rotate until securely tightened.

3- Attaching outer silicone jacket




3A. Insert the silicone jacket by starting with one corner and working your way around in a clockwise or counterclockwise manner. Firmly press in the inside hardcase within the silicone jacket.

3B. Make sure to press all the bumps into the grooves on the backside so the surface is smooth and the silicone jacket is properly set up.

3C. (Optional) If you want to use the 75x75mm VESA connection, remove the VESA cover as shown above and you're ready to connect to another VESA compatible item.

4- Using kickstand

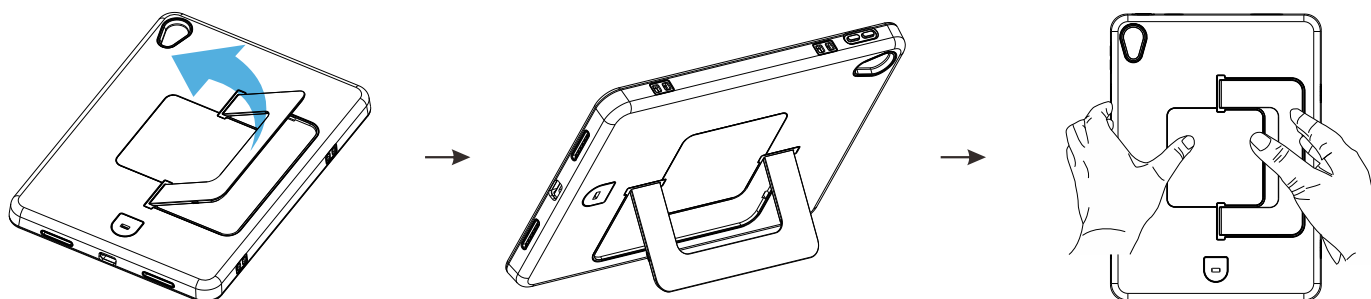

4A. When needing to use kickstand, locate the kickstand at the case rear, and simply fold out the kickstand as shown above.

4B. Make sure it's fully extended out, and then you can start using your tablet and case in a kiosk setup.

4C. When reverting back to a handheld setup, just fold the kickstand back into the flat position. Make sure to click it back in firmly so it's flush with the back of the case.