

VersaGuard Magnetic Protective Tablet Case with POGO Charging, Built-In Kick Stand and Hand Strap


VG-I11 & VG-K11

INSTRUCTION - MANUAL

CONTENTS: M3 x 8 (4) M3 Anti-theft Key (1) х1 **Tablet shown for illustration and not included

INSTRUCTIONS:


1. Setting Up Device into Case




1A. Peel the outer sillicone sleeve from the internal hard case using component (E). Do not take off completely. Peel back enough so you can see the edges of the hard interior case(A).



1B. To open case, first make sure the four specialty screws (C) are removed from the back of the hard case using provided tool (D). Then use your fingers or pick (E), to unclip around all edges. The internal hard case will open when all 4 sides are unclipped. Remove the top cover.




1C.Insert your tablet into the hard case. Begin by plugging in the right angle USB cable before inserting it into the case. After the cable is attached, insert your tablet into the case until everything is aligned and fitted in securely.



1D. Once the tablet device is inside, plug the internal charging cable into the power port of the device. Then re-clip back on the front hard cover on top of the hard case. Make sure to go around the perimeter and clip it all in.




1E. Tighten 4 security screws (C) with the included specialty allen key tool (D). Rotate until securely tightened for all four locations.



1F. Reinstall the external sillicone rubber sleeve jacket. Start with one corner and work your way around. Using your hands, stretch the sillicone jacket back over the edges to fit properly.



2. Setting the Cover in Tabletop or Handheld Mode

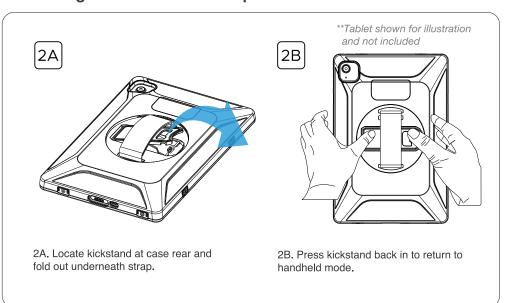


3. Using Handstrap

3A. When kickstand is folded back in, insert hand into strap and push hand in all the way where the strap is near the middle of hand for a secure hold.



4. How to Setup Magnetic Mounting Plate

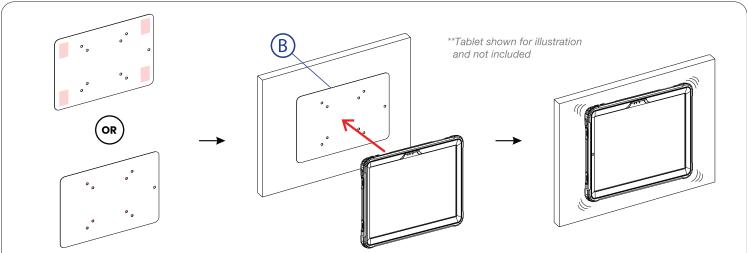

- 4A. Decide whether you're using adhesives or mounting the magnetic plate via VESA holes. If using ahesives, peel off the backing and firmly press against target surface until firmly attached. If mounting with VESA holes, using four screws and hex nuts (not included) and rotate into VESA compatible
- 4B. Place the case's (A) back on the magnetic plate (B) and simply let it grip hold when close and magnetically mount.

