



Curved Stand for Desk or Wall with Heavy Duty Universal Security Holder


USER MANUAL

PAD-CVVTHC

Contents:



x1



x1



x1



x4




x4



x4

Instructions:

1. Installing Base & Holder Together

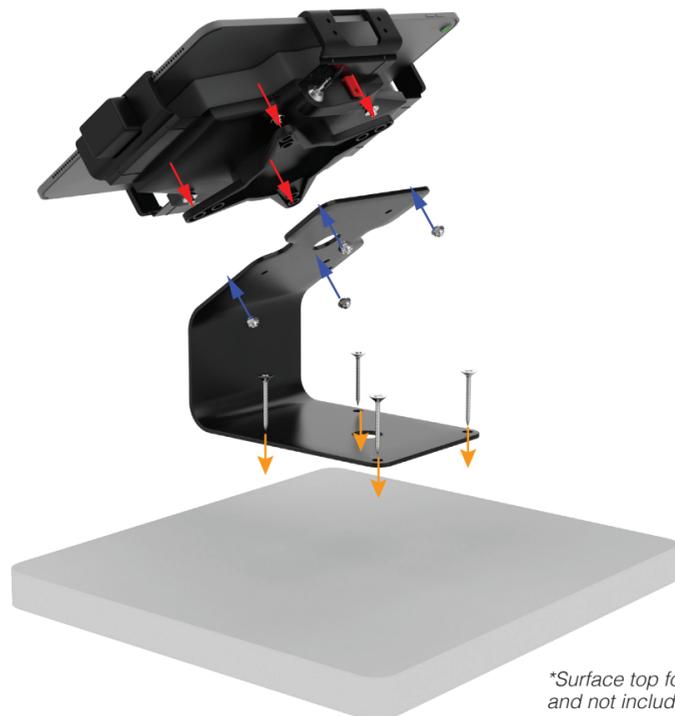

**Surface top for demonstration purposes
and not included*

1. Take the base and align the holes of the VESA component of the base to that of the tablet holder.

2. Using the provided tool, rotate and screw in the (4) screws (shown in red arrow) through the two VESA components while holding the (4) hex nuts from behind with your hand. (Shown with blue arrows)

3) Keep rotating until securely tightened.

4) Screw in (4) nails into surface to securely mount in place. (Shown with orange arrows)

How to Adjust the Foam

Stack different combinations of foams to create a comfortable and firm backing for your tablet for a secure fit




Top View

View from Side of Stacking Foams




Stick on the appropriate foam backing so that your tablet can fit into the holder tightly and secured. When the arms are closed, there is not movement or shifting of the tablet. Test out the foam piece with your tablet before adhering the foam to make sure you used the right thickness.

Adjusting Tablet Holder

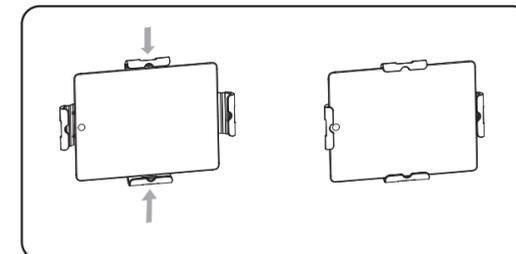

While holder is in 'unlocked' mode, extend the arms outwards until tablet fits comfortable in place. Retract arms until they hold the tablet firmly. Tablet holder can accommodate tablets in cases as well up to 1" thick.

How to Cable Manage and Cable Route with the Holder

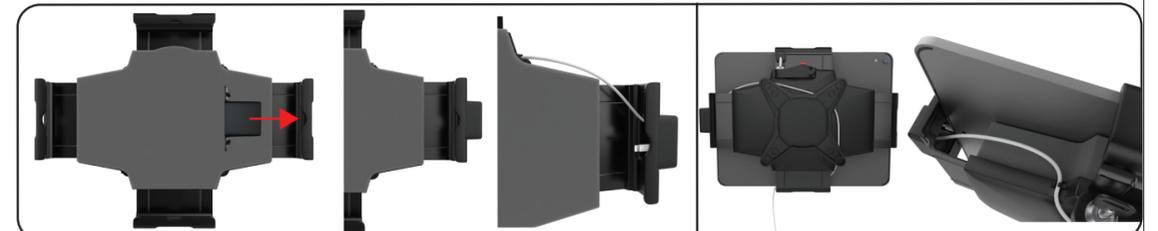

LEFT: Take the rubber security component, line it up with the holder arm that you wish to slide into. The component should line up to the cords that gets plugged into the tablet. With the holder arms extended, place the tablet into the center with the cord plugged in. Arrange and wrap the power cord of the tablet into the rubber security component. Push inwards all arms of the holder until you have a secured and tight fit.

RIGHT: With the other end of the tablet cord, use the (2) clips on the corners of the holder (as shown) to help organize and manage the wire towards the back away from view. Simple add a little pressure and clip the body of the cord into place in the clips.

Locking and Unlocking Holder



RIGHT: Push lever to be in unlock position. Turn key to pop out security button in keyhole to allow for tablet holder arm adjustability. When tablet is placed and arms tightly secured around tablet, push lever to lock position, then push down the button in the keyhole to lock the arm grips in place.

LEFT: Illustrating what the popup button in the keyhole looks like.