




# Heavy-Duty Security Floor Stand with DUAL Goosenecks for Phone and Tablets

USER MANUAL


PAD-SHFS2P

## Contents:

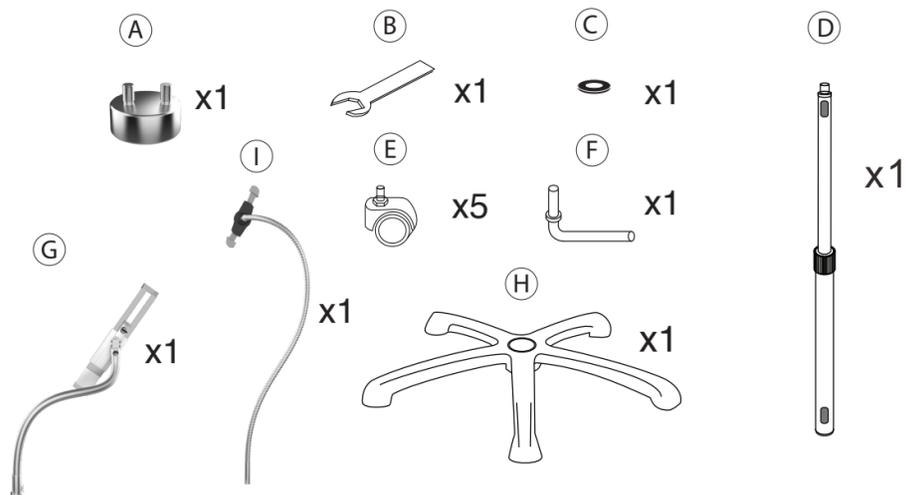


## Instructions:

### 1. Installing the Wheels

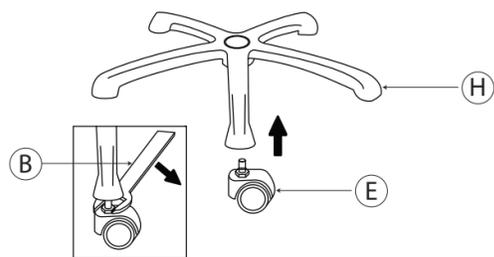


1A. Take one wheel (E) and align it to the leg arm holes on the underneath of the base (H). Initially you can use your hands and manually rotate the wheel until slightly tightened. Then use the provided wrench tool (B) at the hex shaped area and rotate it securely to tighten the rest of the way.

2A. Press the wheel lever up or down to place wheels in locked or unlocked mode depending if you want to be in a mobile or stationary setup. Make sure you adjust all wheels at the same time or it won't properly be set up.




### 2. Attaching Base to Body

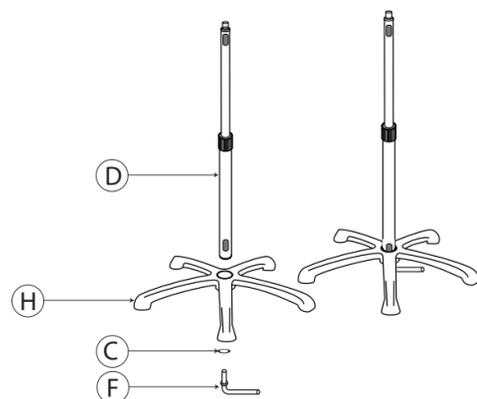

2A. Align the bottom of pole body (D) to the top center of the base (H). While pieces are connected, securely flip over so you can see the bottom. Align washer (C) to the hole on the bottom. Using your hands, identify L-shaped component (F) and rotate through the washer into the hole until securely tightened. Pole body and base should now be securely attached to each other.


### 3. Installing Components Together

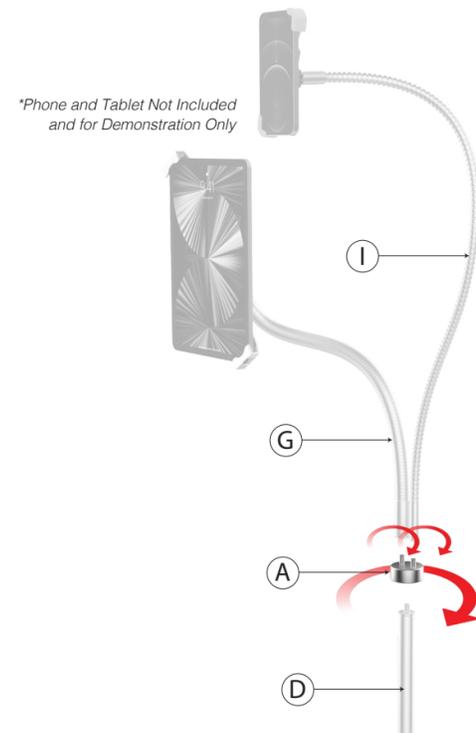


\*Phone and Tablet Not Included and for Demonstration Only

3A. Take dual joint component (A) and using your hands rotate it onto the very top of the main body pole where the male adapter is until securely attached. Then take either of the goosenecks (G, I) and rotate it onto the joint component until securely fastened. Repeat for both goosenecks as illustrated to the left.


### 4. Adjusting Pole Height

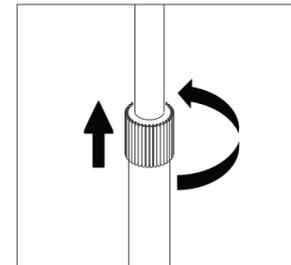

4A. Rotate to loosen

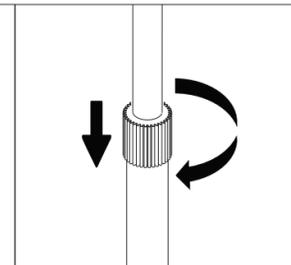


4B. Raise or lower metal pole to desired height. Rotate opposite direction to tighten and secure height.

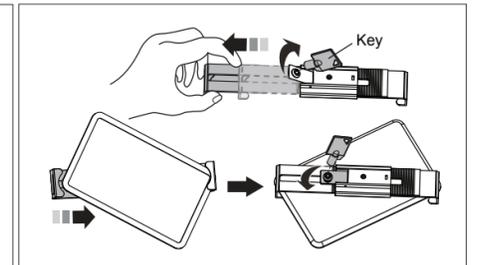

5A. Insert Key into lock at the back of the holder. Rotate counter clockwise to unlock, pull back the key and keylock so the holder becomes free. Extend arms to open to fit tablet at corners. Insert tablet into holder, retract holder arms around corners until snug fit. Push forward key with key lock back into the holder. Then rotate key clockwise to tighten.


### 5. Placing Tablet into Security Holder

### Setting Up Phone Holder

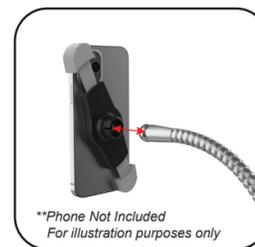


\*\*Phone Not Included For illustration purposes only

1. Attach phone holder to the end of the ball joint. Apply some force and it should snap onto each other.

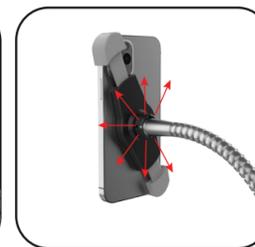

2. Adjust the tilt to preferred angle.

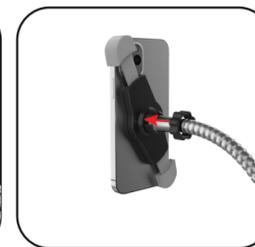

3. Slide the ring through the gooseneck as illustrated above, until it meets the back of the phone holder.



4. Rotate clockwise until securely tightened.