



Wireless Charging Case and Docking Station Wall Mount for iPad 10th Gen


KIT-ICCWALL109

Caution: For proper results, please make sure your device is properly aligned with the inductive charging plate.

Caution: Please do not place or store the product on or near high-temperature areas like heating devices, open flame, or in hot cars in extreme heat.

Caution: Please do not place or store the product in or near water, steam, or in any wet, humid, or damp places.

CONTENTS:

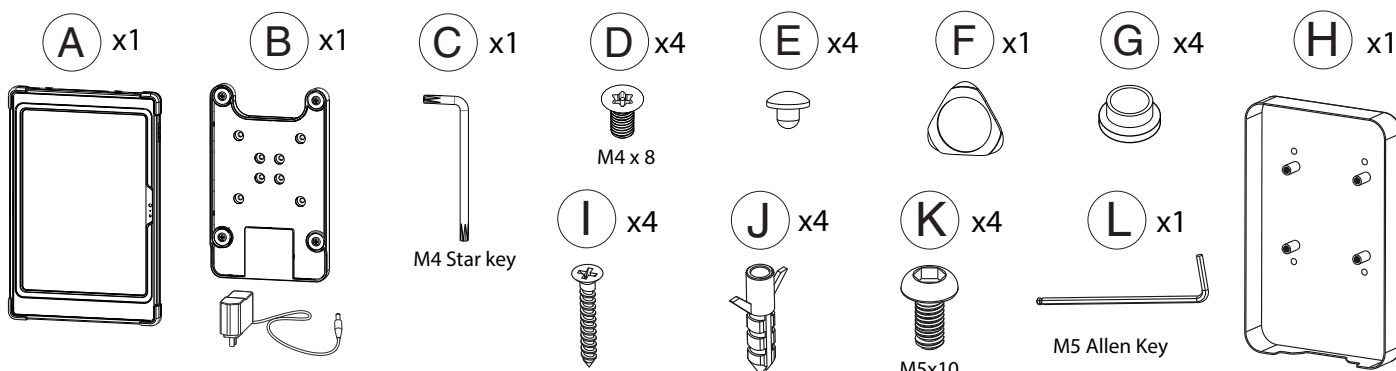

Power Supply:

Input : AC 100-240V 50/60Hz

Output: DC12V 1.5A

Rating power: 18W

Cable Length: 1.8M

DC Plug: 5.5*2.1mm male DC Plug

Inductive Charging Case:

Qi Standard: V1.2.4

Input: DC12V 1.3A

Output: DC5V 2.4A(Max.)

Rating Power: 15W

Efficiency: 80-85%(Max.)

Inductive Distance: 3-6mm

Input Socket: 5.5*2.1mm female DC socket

Output Plug: Apple Lightning Plug

Charging Time : 4-4.5 hours)


Environmental Requirements:

Operating Temperature for iPad: 32°F to 95°F / 0°C to 35°C


Nonoperating Temperature: -4°F to 113°F / -20°C to 45°C

INSTALLATION:


1. Inserting Tablet into case

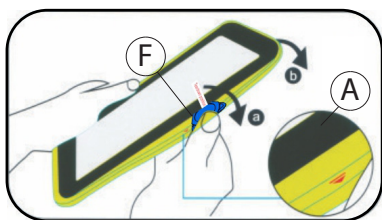


1A. Peel the external silicone sleeve from the internal hard case using component (F).

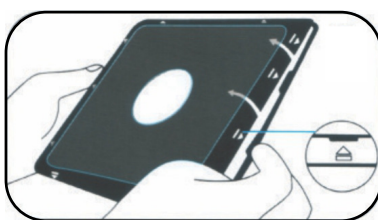


1B. To open case, apply gentle pressure to the small clips (noted on the diagram by arrows). The internal hard case will open when all four sides are unclipped.

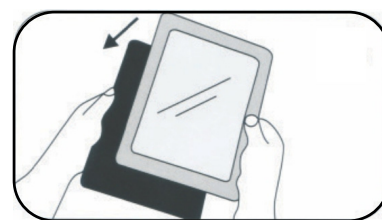


1C. Insert the iPad into the back portion of the hard cover.

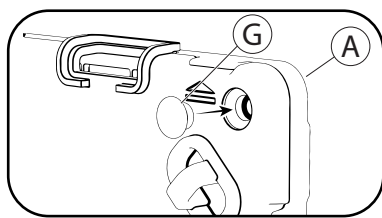

1D. Find corner plugs (G), and insert them firmly in the the corners to complete this phase of installation.

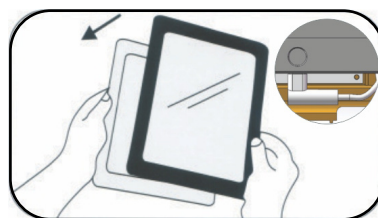


1E. Once the tablet device is inside, plug the charging cable into the power socket. Then place the internal front (hard) cover on top of the case, and gently clip all four sides shut.

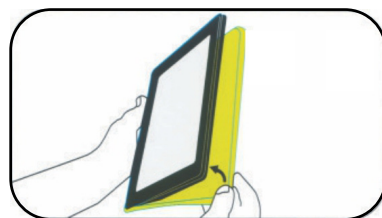


1F. Reinstall the external silicone rubber sleeve.

2. Mounting Wall adapter to Wall


No Anchors

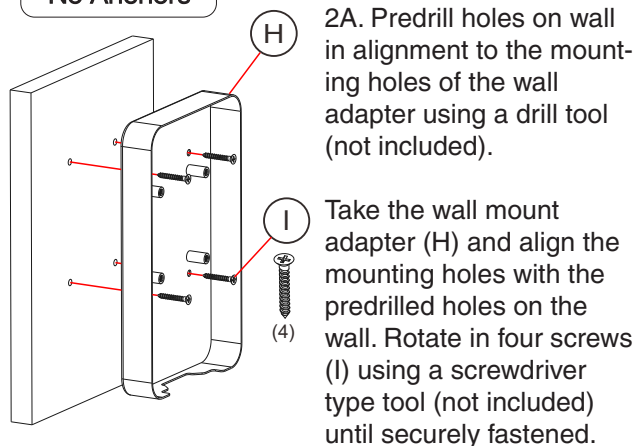


With Anchors

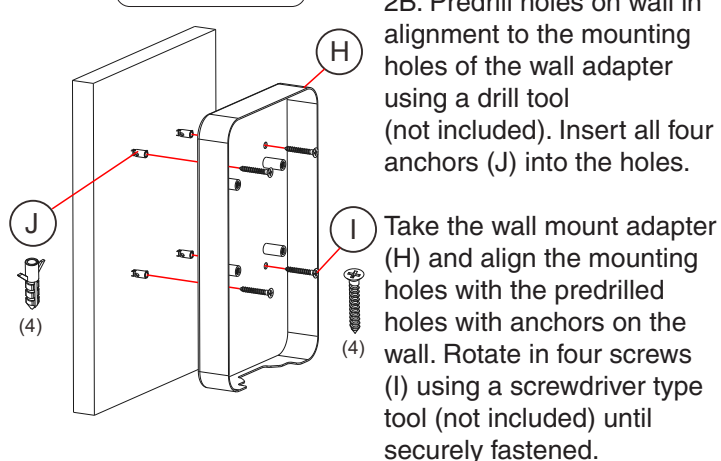



3. When Attaching Induction Dock to Wall Mount Adapter

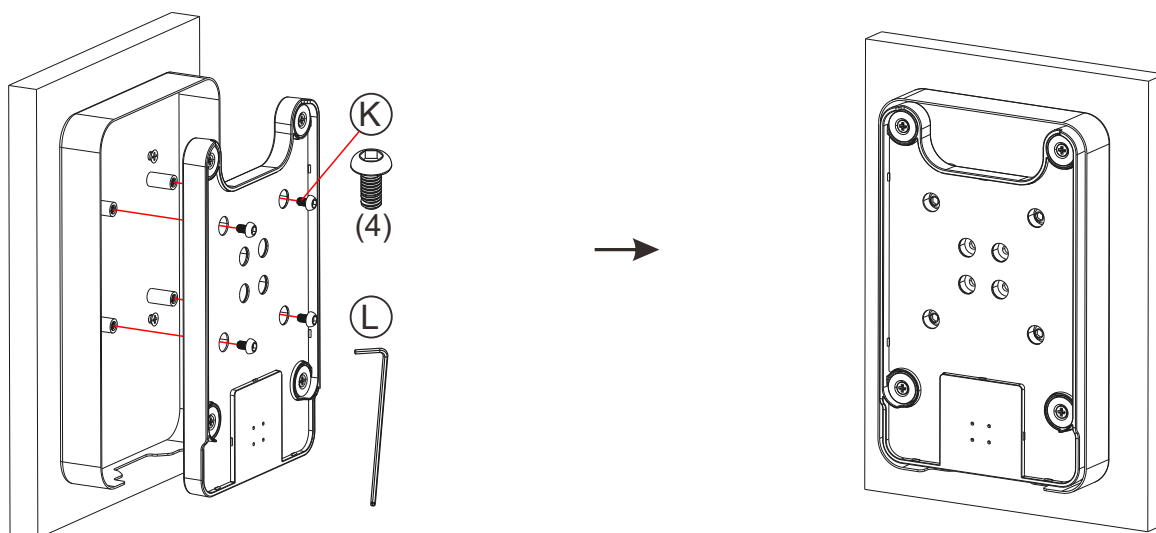


4. Charging the Tablet Device

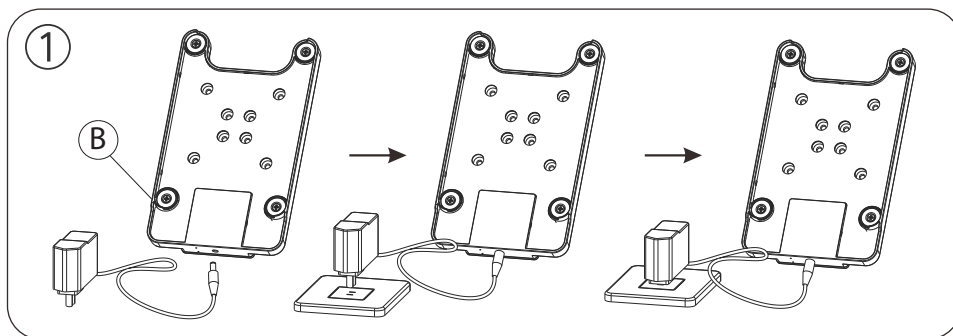

Connect the AC/DC power supply to the charging plate as shown above.

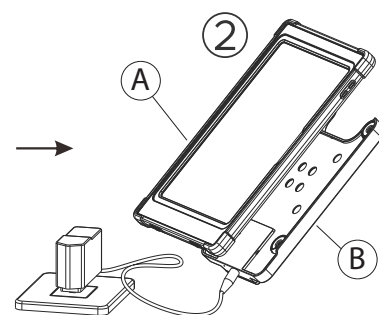

There should be a power level indicator on the tablet screen.

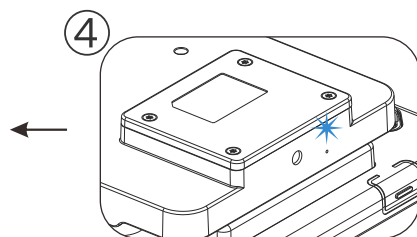

The blue indicator light indicates that the tablet device is properly connected to the inductive charging plate.

Make sure that the charging case and the back charging plate are aligned properly. You should see a blue indicator lighting up on the back of the charging plate.

